Assessment of application against relevant Development Codes

APPLICATION DETAILS

APPLICATION		PRE	MISES
FILE NO:	MCU/22/0021	ADDRESS:	19 Herberton Street, Mareeba
APPLICANT:	Selena Carabot	RPD:	Lot 16 on RP700549
LODGED BY:	Freshwater Planning Pty Ltd	AREA:	1,012m ²
DATE LODGED:	13 October 2022	OWNER:	S Carabot
TYPE OF APPROVAL:	Development Perm	it	
PROPOSED DEVELOPMENT:	Reconfiguring a Lot - Subdivision (1 into 2 Lots) and Material Change of Use - Dual Occupancy		
PLANNING SCHEME:	Mareeba Shire Council Planning Scheme 2016		
ZONE:	Medium density residential		
LEVEL OF ASSESSMENT:	Code assessment		
SUBMISSIONS:	N/A - Code assessr	ment only	

Relevant Development Codes

The following Development Codes are considered to be applicable to the assessment of the application:

- 6.2.7 Medium density residential zone code
- Accommodation activities code 9.3.1
- 9.4.2 Landscaping code
- 9.4.3
- 9.4.4
- Parking and access code
 Reconfiguring a lot code
 Works, services and infrastructure code 9.4.5

6.2.7 Medium density residential zone code

6.2.7.1 Application

- (1) This code applies to assessing development where:
 - (a) located in the Medium density residential zone; and
 - (b) it is identified in the assessment benchmarks for assessable development and requirements for accepted development column of an assessment table in Part 5 of the planning scheme.

6.2.7.2 Purpose

- (1) The purpose of the medium density residential zone code is to provide for medium density multiple dwellings supported by community uses and small-scale services and facilities that cater for local residents.
- (2) Mareeba Shire Council's purpose of the Medium density residential zone code is to facilitate medium residential densities and a diversity of housing which caters for a range of households in locations which are proximate to town centres, community facilities and open space.
 - Small lot housing is facilitated and medium density development may include Dual occupancy and Multiple dwelling development in the form of town houses, apartments and units.
- (3) The purpose of the code will be achieved through the following overall outcomes:
 - Development provides a range of residential dwelling choices including Multiple dwellings in locations clustered around or near activity centres and transport networks;
 - (b) Development encourages and facilitates urban consolidation and the efficient use of physical and social infrastructure;
 - (c) Development is supported by employment nodes, community facilities and services, transport and commercial hubs where appropriate; Development provides and maintains a high level of amenity in the zone and is reflective of the desired character of the area;
 - (d) The scale and density of development facilitates an efficient land use pattern that supports safe and walkable neighbourhoods that are well connected to employment nodes, centres, open space and recreational areas, community services and educational opportunities;
 - (e) Other small-scale development that integrates personal employment and residential activities is encouraged, provided it complements local residential amenity;
 - (f) Development maintains a high level of residential amenity avoiding uses that introduce impacts associated with noise, hours of operation, traffic, advertising devices, visual amenity, privacy, lighting, odour and emissions;
 - (g) Non-residential development may be supported where such uses directly support the day to day needs of the immediate residential community; and
 - (h) Development responds to land constraints and mitigates any adverse impacts on adjacent land uses and the environment.

Document Set ID: 4157803 Version: 1, Version Date: 09/11/2022

6.2.7.3 Criteria for assessment

Table 6.2.7.3A—Medium density residential zone code - For accepted development subject to requirements and assessable development

Acceptable outcomes	Complies	Comments
bject to requirements and ass	sessable devel	opment
AO1 Development has a maximum building height of: (a) 8.5 metres; and (b) 2 storeys above ground level.	•	Complies.
scale		
AO2 Domestic outbuildings do not exceed: (a) 100m² in gross floor area; and (b) 5.5 metres in height above natural ground level.	n/a	Not applicable.
	AO1 Development has a maximum building height of: (a) 8.5 metres; and (b) 2 storeys above ground level. AO2 Domestic outbuildings do not exceed: (a) 100m² in gross floor area; and (b) 5.5 metres in height above natural	AO1 Development has a maximum building height of: (a) 8.5 metres; and (b) 2 storeys above ground level. AO2 Domestic outbuildings do not exceed: (a) 100m² in gross floor area; and (b) 5.5 metres in height above natural

Performance outcomes	Acceptable outcomes	Complies	Comments
PO3 Development is sited in a manner that considers and respects: (a) the siting and use of adjoining premises; (b) access to sunlight and daylight for the site and adjoining sites; (c) privacy and overlooking; (d) opportunities for casual surveillance of adjoining public spaces;	AO3.1 Buildings and structures include a minimum setback of: (a) 6 metres from the primary road frontage; and (b) 3 metres from any secondary road frontage.	Complies with PO3	The garages of both the proposed dual occupancy units will be setback just 2.5 metres from Constance Street. The proposed setback is not inconsistent with other lesser setbacks along the street. The road itself is wide, with a formation width of 20 metres kerb and total reserve width of 30 metres. The lesser setback is not likely to impact on the criteria mentioned in PO3.
(e) air circulation and access to natural breezes; (f) appearance of building bulk; and (g) relationship with road corridors.	AO3.2 Buildings and structures include a minimum setback of 2 metres from side and rear boundaries.	Complies with PO2	Considering the location of the sewer main running through the site, it is likely the units will be constructed within the northern 2m boundary setback. The lesser setback will not impact on the northern adjoining allotment and will also not compromise the criteria in PO3. Boundary screen fencing will be conditioned.
Accommodation density			
The density of Accommodation activities: (a) contributes to housing choice and affordability; (b) respects the nature and density of surrounding land use; (c) does not cause amenity impacts beyond the reasonable expectation of accommodation	AO4 Development provides a maximum density for Accommodation activities in compliance with Table 6.2.7.3B.		The development complies with PO4.

Perf	ormance outcomes	Acceptable outcomes	Complies	Comments
(d)	density for the zone; and is commensurate to the scale and frontage of the site.			
Gros	ss floor area			
	lings and structures by the site in a manner makes efficient use of land; is consistent with the bulk and scale of surrounding buildings; and appropriately balances built and natural features.	AO5 Gross floor area does not exceed 600m².		Complies.
For	assessable developme	nt	I	
Buil	ding design			
PO6 Build appr (a) (b) (c) (d) (e)	ding facades are opriately designed to: include visual interest and architectural variation; maintain and enhance the character of the surrounds; provide opportunities for casual surveillance; include a human scale; and encourage occupation of outdoor space.	AO6 Buildings include habitable space, pedestrian entrances and recreation space facing the primary road frontage.		Complies where applicable.

Perf	ormance outcomes	Acceptable outcomes	Complies	Comments		
and estal of resid	elopment complements integrates with the blished built character the Medium density lential zone, having rd to: roof form and pitch; eaves and awnings; building materials, colours and textures; and window and door size and location.	AO7 No acceptable outcome is provided.	•	Complies.		
Non	-residential developme	nt				
(a) (b) (c) (d)	residential elopment: is consistent with the scale of existing development; does not detract from the amenity of nearby residential uses; directly supports the day to day needs of the immediate residential community; and does not impact on the orderly provision of non-residential development in other locations in the shire.	AO8 No acceptable outcome is provided.	n/a	Not applicable - the application proposes a residential use.		
Ame	Amenity					
detra	elopment must not act from the amenity of local area, having rd to: noise; hours of operation; traffic; advertising devices; visual amenity; privacy;	AO9 No acceptable outcome is provided.	•	Complies.		

Performance outcomes	Acceptable outcomes	Complies	Comments
(g) lighting;(h) odour; and(i) emissions.			
PO10 Development must take into account and seek to ameliorate any existing negative environmental impacts, having regard to: (a) noise; (b) hours of operation; (c) traffic; (d) advertising devices; (e) visual amenity; (f) privacy; (g) lighting; (h) odour; and (i) emissions.	AO10 No acceptable outcome is provided.	n/a	Not applicable.

Table 6.2.7.3B—Maximum densities for Accommodation activities

Use	Maximum density	
Dual occupancy	1 dwelling per 300m ² of site area	
Multiple dwelling	 (a) 1 dwelling per 150m² of site area; and (b) 1 bedroom per 75m² of site area. 	
Residential care facility	1 dwelling or accommodation unit per 100m ² of site area.	
Retirement facility	1 dwelling or accommodation unit per 150m ² of site area	

9.3.1 Accommodation activities code

9.3.1.1 Application

- (1) This code applies to assessing development where:
 - (a) involving Accommodation activities; and
 - (b) it is identified in the assessment benchmarks for assessable development and requirements for accepted development column of an assessment table in Part 5 of the planning scheme.

9.3.1.2 Purpose

- (1) The purpose of the Accommodation activities code is to facilitate the provision of Accommodation activities in appropriate locations throughout the shire.
- (2) The purpose of the code will be achieved through the following overall outcomes:
 - (a) Accommodation activities are designed, located and operated to minimise any adverse impacts on the natural environment and amenity of surrounding uses;
 - (b) Accommodation activities in the Centre zone are facilitated where they can integrate and enhance the fabric of the centre and are located behind or above commercial development;
 - (c) Accommodation activities provide a high level of amenity and are reflective of the surrounding character of the area;
 - (d) Accommodation activities are generally established in accessible, well-connected locations with access or future access to public transport, cycling and pedestrian networks;
 - (e) Accommodation activities do not compromise the viability of the hierarchy and network of centres, namely:
 - (i) Mareeba as a major regional activity centre, which accommodates the most significant concentrations of regional-scale business, retail, entertainment, government administration, secondary and tertiary educational facilities and health and social services within the shire;
 - (ii) Kuranda as a village activity centre, which accommodates services, arts and cultural facilities, sports and recreation facilities, business and employment uses to support the village and its constituent surrounding rural and rural residential communities;
 - (iii) Chillagoe and Dimbulah as Rural activity centres, which provide commercial and community services to their rural catchments; and
 - (iv) Biboohra, Irvinebank, Julatten, Koah, Mutchilba, Mt Molloy, Myola and Speewah as rural villages, that have limited centre activities and other non-residential activities; and
 - (f) Accommodation activities are responsive to site characteristics and employ best practice industry standards.

Document Set ID: 4157803 Version: 1, Version Date: 09/11/2022

9.3.1.3 Criteria for assessment

Table 9.3.1.3A—Accommodation activities code – For accepted development subject to requirements and assessable development

Performance outcomes	Acceptable outcomes	Complies	Comments	
For accepted development subject to requirements and assessable development				
All Accommodation activities	s, apart from Dwelling house			
Accommodation activities are located on a site that includes sufficient area: (a) to accommodate all buildings, structures, open space and infrastructure associated with the use; and (b) to avoid adverse impacts on the amenity or privacy of nearby land uses.	AO1 Development is located on a site which provides the applicable minimum site area and minimum road frontage specified in Table 9.3.1.3B.	Complies with PO1	Table 9.3.1b dictates a minimum site area of 600m² for dual occupancy development. Despite being smaller in size, the northern lot proposed for the unit development is still able to accommodate the proposed units without compromising on open space and the amenity of neighbouring properties. The development complies with PO1.	
	s, apart from Tourist park and D	Owelling house		
Accommodation activities are provided with on-site refuse storage areas that are: (a) sufficient to meet the anticipated demand for refuse storage; and (b) appropriately located on the site having regard to potential odour and noise impacts on uses on the site and adjoining sites.	A refuse area is provided that: (a) includes a water connection; (b) is of a size and configuration to accommodate 2x240 litre bins per dwelling or accommodation unit where involving a use other than a residential care facility or retirement facility; and (c) is of a size and configuration to accommodate a minimum of two bulk refuse bins where involving a residential care facility or retirement facility.		Will be conditioned to comply where relevant.	

Performance outcomes	Acceptable outcomes	Complies	Comments
Accommodation activities are designed to avoid overlooking or loss of privacy for adjoining uses. Note—These provisions apply to any adjoining use, both on an adjoining site and on the same site.	The windows of habitable rooms: (a) do not overlook the windows of a habitable room in an adjoining dwelling or accommodation unit; or (b) are separated from the windows of a habitable room in an adjoining dwelling or accommodation unit by a distance greater than: (i) 2 metres at ground level; and (ii) 8 metres above ground level; or (c) are treated with: (i) a minimum sill height of 1.5 metres above floor level; or (ii) fixed opaque glassed installed below 1.5 metres; or (iii) fixed external screens; or (iv) a 1.5 metre high screen fence along the common boundary.		Can be conditioned to comply where relevant.
PO4 Accommodation activities are provided with sufficient private and communal open space areas which: (a) accommodate a range of landscape treatments, including soft and hard landscaping; (b) provide a range of	AO4.1 Development, except for Caretaker's accommodation, Dwelling house, Dual occupancy or Home based business, includes communal open space which meets or exceeds the minimum area, dimension and design parameters specified in Table 9.3.1.3C.	n/a	Not applicable.
opportunities for passive and active recreation; (c) provide a positive outlook and high quality of amenity to residents;	AO4.2 Development includes private open space for each dwelling or accommodation unit which meets or exceeds the minimum area, dimension and design parameters specified in Table 9.3.1.3D.	•	Complies.

Perfo	ormance outcomes	Acceptable outcomes	Complies	Comments
(d) (e)	is conveniently located and easily accessible to all residents; and contribute to an active and attractive	AO4.3 Clothes drying areas are provided at the side or rear of the site so that they are not visible from the street.	~	Can be conditioned to comply.
	streetscape.	If for Dual occupancy, Multiple dwelling, Residential care facility or Retirement facility, development provides a secure storage area for each dwelling or accommodation unit which: (a) is located to facilitate loading and unloading from a motor vehicle; (b) is separate to, and does not obstruct, on-site vehicle parking or manoeuvring areas; (c) has a minimum space of 2.4m² per dwelling or accommodation unit; (d) has a minimum height of 2.1 metres; (e) has minimum dimensions to enable secure bicycle storage; (f) is weather proof; and (g) is lockable.		Complies - Satisfied by the provision of a double lock up garage for each unit.
	Caretaker's Accommod		,	N. (P. 11
is of a	taker's accommodation a scale and intensity n is consistent with that e surrounding area.	AO5.1 Only one caretaker's accommodation is established on the title of the non-residential use.	n/a	Not applicable.
Accom develo bench	-Where Caretaker's amodation is assessable apment additional assessment marks are provided under "for sable development".	AO5.2 In the Rural zone, Caretaker's accommodation has a maximum gross floor area of 200m ² .	n/a	Not applicable.

Perf	ormance outcomes	Acceptable outcomes	Complies	Comments
	Dwelling house			
PO6 When involved	re a Dwelling house wes a secondary ling, it is designed and ed to: not dominate the site; remain subservient to the primary dwelling; and be consistent with the character of the	AO6.1 The secondary dwelling is located within: (a) 10 metres of the primary dwelling where on a lot that has an area of 2 hectares or less; or (b) 20 metres of the primary dwelling where on a lot that has an area of greater than 2 hectares.	n/a	Not applicable.
	surrounding area;	A secondary dwelling has a maximum gross floor area of 100m ² .	n/a	Not applicable.
If for	Dual occupancy			
occu	re establishing a Dual pancy on a corner lot, uilding is designed to: maximise	AO7.1 Where located on a corner allotment, each dwelling is accessed from a different road frontage.	n/a	Not applicable.
(b)	opportunities for causal surveillance; provide for separation between the two dwellings; and provide activity and visual interest on both frontages.	AO7.2 The maximum width of garage or carport openings that face a public street is 6 metres or 50% of the building width, whichever is the lesser.	V	Complies.
If for	Multiple dwelling, Resi	dential care facility or Retireme	nt facility	
appro	elopment is opriately located within shire to: maximise the efficient utilisation of existing infrastructure, services and facilities; and minimise amenity impacts through the collocation of compatible uses.	AO8 Multiple dwelling, Residential care facility or Retirement facility uses are located on land within 800 metres of the boundary of land within the Centre zone.	n/a	Not applicable.
facility assess assess provid	-Where Residential care or Retirement facility is sable development additional sment benchmarks are ed under "for assessable opment".			

PO9 Sulidings are designed to: (a) reduce the appearance of building bulk; (b) provide visual interest through articulation and variation; (c) be compatible with the scale of surrounding buildings buildings buildings (d) be compatible with the scale of surrounding buildings buildings Note—Where Residential care facility or Retirement facility; assessable development additional average are provided under for assessable development. A09.1 External walls do not exceed 10 metres in continuous length unless including a minimum of three of the following building design features and architectural elements: (a) a change in parapet coping; or (b) a change in parapet coping; or (c) a change in awning design; or (d) a change in the wall plane; or (e) a change in the exterior finishes and exterior colors of the development. A09.2 For a Multiple dwelling, Residential care facility or Retirement faces a road is 6 metres. A09.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, toof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility or Retirement facility. PO10 The layout and design of the story part of the color part of the facility. A01.1 The layout and design of the story part of the facility or Retirement facility. A02.1 A03.2 For a facility or Retirement facility or Retirement			l		
Buildings are designed to: (a) reduce the appearance of building bulk; (b) provide visual interest through articulation and variation; (c) be compatible with the embedded, historical character for the locality; and (d) be compatible with the scale of surrounding buildings Note—Where Residential care facility or Retirement facility is assessable development. Not applicable. Not applicable. Not applicable. Residential care facility or Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 metres. A09.3 For a Multiple dwelling, Residential care facility or Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 metres. A09.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: Or Retirement facility or Retirement facility The development incorporates covered walkleways and ramps on site for weather protection	Perf	ormance outcomes	Acceptable outcomes	Complies	Comments
Buildings are designed to: (a) reduce the appearance of building bulk; (b) provide visual interest through articulation and variation; (c) be compatible with the embedded, historical character for the locality; and (d) be compatible with the scale of surrounding buildings Note—Where Residential care facility or Retirement facility is assessable development. Note—Where Residential care facility or Retirement facility is assessable development. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 metres. A09.3 For a Multiple dwelling, Residential care facility or Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 metres. A09.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: On the development incorporates covered walkeways and ramps on site for weather protection	PO9		AO9.1	✓	Complies.
appearance of building bulk; (b) provide visual interest through articulation and variation; (c) be compatible with the embedded, historical character for the locality; and (d) be compatible with the scale of surrounding buildings Note—Where Residential care facility or Retirement facility in assessment benchmarks are provided under "for assessable development". Note—Where Residential care facility or Retirement facility is assessment benchmarks are provided under "for assessable development". A09.2 For a Multiple dwelling, Residential care facility or Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 metres. A09.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility to Retirement facility, to forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: or the following building a dramps on site for weather protection nad architectural elements: and a change in proper profile; or a change in parapet coping; or a change in the valle plane; or a change in the valle voles	Build	lings are designed to:	External walls do not exceed 10		·
building bulk; (b) provide visual interest through articulation and variation; (c) be compatible with the embedded, historical character for the locality; and (d) be compatible with the scale of surrounding buildings Note—Where Residential care facility or Retirement facility is assessable development different for assessable development. A09.2 For a Multiple dwelling, Residential care facility or Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 metres. A09.3 For a Multiple dwelling, Residential care facility or Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 metres. A09.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, or of forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility or Retire	(a)	reduce the	metres in continuous length		
(b) provide visual interest through articulation and variation; (c) be compatible with the embedded, historical character for the locality; and (d) be compatible with the scale of surrounding buildings Note—Where Residential care facility or Retirement facility or Retirement facility is assessable development did incompanies. Note—Where Residential care facility or Retirement facility is and cassessable development additional assessment benchmarks are provided under "for assessable development." A09.2 For a Multiple dwelling, Residential care facility or Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 melres. A09.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: Not applicable.		appearance of	unless including a minimum of		
through articulation and variation; (c) be compatible with the embedded, historical character for the locality; and (d) be compatible with the scale of surrounding buildings Note—Where Residential care facility or Retirement facility is assessable development additional assessment benchmarks are provided under for assessable development additional assessment benchmarks are provided under for assessable development additional assessment benchmarks are provided under for assessable development additional assessment benchmarks are provided under for assessable development additional assessment benchmarks are provided under for assessable development. AO9.2 For a Multiple dwelling, Residential care facility or Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 metres. AO9.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. AO9.4 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. AO9.4 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. AO9.4 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. AO9.4 For a Multiple dwelling, Residential care facility or Retirement facility, to forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: or the development incorporates covered walkways and ramps on site for weather protection		building bulk;	three of the following building		
and variation; (c) be compatible with the embedded, historical character for the locality; and (d) be compatible with the scale of surrounding buildings Note—Where Residential care facility or Retirement facility is assessable development additional assessment benchmarks are provided under "for assessable development". AO9.2 For a Multiple dwelling, Residential care facility or Retirement facility is maximum width of a garage or carport opening that faces a road is 6 metres. AO9.3 For a Multiple dwelling, Residential care facility or Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 metres. AO9.3 For a Multiple dwelling, Residential care facility, the building(s) include awnings with a minimum overhang of 600mm. AO9.4 For a Multiple dwelling, Residential care facility, the building(s) include awnings with a minimum overhang of 600mm. AO9.4 For a Multiple dwelling, Residential care facility, the building(s) include awnings with a minimum overhang of 600mm. AO9.4 For a Multiple dwelling, Residential care facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and or the following syne and the development incorporates covered walkways and ramps on site for weather protection	(b)	provide visual interest	design features and		
(c) be compatible with the embedded, historical character for the locality; and (d) be compatible with the scale of surrounding buildings Note—Where Residential care facility or Retirement facility or Retirement facility or Retirement facility or Retirement facility, the maximum with of a garage or carport opening that faces a road is 6 metres. AO9.2 For a Multiple dwelling, Residential care facility or Retirement facility, the maximum with of a garage or carport opening that faces a road is 6 metres. AO9.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. AO9.4 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. AO9.4 For a Multiple dwelling, Residential care facility or Retirement facility, rethe following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and			architectural elements:		
embedded, historical character for the locality; and (d) be compatible with the scale of surrounding buildings Note—Where Residential care facility or Retirement facility is assessable development. Note—Where Residential care facility or Retirement facility is a change in the wall plane; or (e) a change in the wall plane; or (e) a change in the exterior finishes and exterior colours of the development. A09.2 For a Multiple dwelling, Residential care facility, the maximum width of a garage or carport opening that faces a road is 6 metres. A09.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 800mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 800mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, rof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and			(a) a change in roof profile;		
character for the locality; and (d) be compatible with the scale of surrounding buildings Note—Where Residential care facility or Retirement facility is assessable development additional assessment benchmarks are provided under "for assessable development." (e) a change in the wall plane; or (e) a change in the exterior colours of the development. AO9.2 For a Multiple dwelling, Residential care facility or Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 metres. AO9.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. AO9.4 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. AO9.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and	(c)				
coality; and coal		•			
(d) be compatible with the scale of surrounding buildings Note—Where Residential care facility or Retirement facility is assessable development additional assessment benchmarks are provided under "for assessable development additional assessment benchmarks are provided under "for assessable development and the provided under "for assessable development." A09.2 For a Multiple dwelling, Residential care facility or Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 metres. A09.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, the building (s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility or Ret			. •		
Scale of surrounding buildings Note—Where Residential care facility or Retirement facility is assessable development additional assessment benchmarks are provided under "for assessable development." A09.2 For a Multiple dwelling, Residential care facility or Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 metres. A09.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility or Reti					
buildings Note—Where Residential care facility or Retirement facility is assessable development dailtily is assessable development additional assessment benchmarks are provided under "for assessable development". A09.2 For a Multiple dwelling, Residential care facility or Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 metres. A09.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility P010 The layout and design of the site: (a) promotes safe and	(d)		,		
Note—Where Residential care facility or Retirement facility is assessable development additional assessment benchmarks are provided under for assessable development. A09.2 For a Multiple dwelling, Residential care facility or Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 metres. A09.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and			\ /		
Note—Where Residential care facility is assessable development additional assessment benchmarks are provided under "for assessable development". AO9.2 For a Multiple dwelling, Residential care facility or Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 metres. AO9.3 For a Multiple dwelling, Residential care facility or Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 metres. AO9.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. AO9.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and		buildings	l e		
facility or Retirement facility is assessable development additional assessment benchmarks are provided under "for assessable development". A09.2 For a Multiple dwelling, Residential care facility or Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 metres. A09.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility P010 The layout and design of the site: (a) promotes safe and	Note-	-Where Residential care			
assessment benchmarks are provided under for assessable development. AO9.2 For a Multiple dwelling, Residential care facility or Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 metres. AO9.3 For a Multiple dwelling, Residential care facility or Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 metres. AO9.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. AO9.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and	facility	or Retirement facility is			
development. AO9.2 For a Multiple dwelling, Residential care facility or Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 metres. AO9.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. AO9.4 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. AO9.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and					
AO9.2 For a Multiple dwelling, Residential care facility or Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 metres. AO9.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. AO9.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and AO9.1 The development incorporates covered walkways and ramps on site for weather protection					
For a Multiple dwelling, Residential care facility or Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 metres. AO9.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. AO9.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and AO10.1 The development incorporates covered walkways and ramps on site for weather protection				nla	Not applicable
Residential care facility or Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 metres. AO9.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. AO9.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and				II/a	тчот арріїсавіс.
Retirement facility, the maximum width of a garage or carport opening that faces a road is 6 metres. A09.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and Retirement facility, the building, Residential care facility or Retirement facility A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility A010.1 The development incorporates covered walkways and ramps on site for weather protection			,		
maximum width of a garage or carport opening that faces a road is 6 metres. AO9.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. AO9.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and AO10.1 The development incorporates covered walkways and ramps on site for weather protection					
carport opening that faces a road is 6 metres. AO9.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. AO9.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and Not applicable. Not applicable. Not applicable.					
road is 6 metres. A09.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and Not applicable. Not applicable. Not applicable.					
AO9.3 For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. AO9.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and Not applicable. Not applicable. Not applicable. Not applicable.					
For a Multiple dwelling, Residential care facility or Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. AO9.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and AO10.1 The development incorporates covered walkways and ramps on site for weather protection			AO9.3	n/a	Not applicable.
Retirement facility, the building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and Retirement facility, the building, Residential care facility or Retirement facility or Retirement facility Not applicable. Not applicable.			For a Multiple dwelling,		
building(s) include awnings with a minimum overhang of 600mm. A09.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and building(s) include awnings with a minimum overhang of 600mm. n/a Not applicable. Not applicable.			Residential care facility or		
with a minimum overhang of 600mm. AO9.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and with a minimum overhang of 600mm. Not applicable. Not applicable. Not applicable.			Retirement facility, the		
AO9.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and AO9.4 For a Multiple dwelling, Residenting, (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. Not applicable. Not applicable.					
AO9.4 For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and AO9.4 For a Multiple dwelling, Residenting, The development incorporates covered walkways and ramps on site for weather protection			with a minimum overhang of		
For a Multiple dwelling, Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and For a Multiple dwelling, Residential, care facility or Retirement facility Not applicable. The development incorporates covered walkways and ramps on site for weather protection					
Residential care facility or Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and Residential care facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility AO10.1 The development incorporates covered walkways and ramps on site for weather protection				n/a	Not applicable.
Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and Retirement facility, roof forms include one or more of the following types: (a) pyramidal; (b) hip or hipped; (d) skillion. If for Residential care facility or Retirement facility AO10.1 The development incorporates covered walkways and ramps on site for weather protection					
include one or more of the following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and on site for weather protection India Not applicable.					
following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and following types: (a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. Not applicable. Not applicable.			,		
(a) pyramidal; (b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and on site for weather protection (b) hip or hipped; (c) gable; (d) skillion. Not applicable.					
(b) hip or hipped; (c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and on site for weather protection Not applicable. Not applicable.					
(c) gable; (d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and on site for weather protection (d) skillion. n/a Not applicable.					
(d) skillion. If for Residential care facility or Retirement facility PO10 The layout and design of the site: (a) promotes safe and (d) skillion. Not applicable. Indicate: Not applicable. Not applicable.			` , '		
PO10 The layout and design of the site: (a) promotes safe and AO10.1 The development incorporates covered walkways and ramps on site for weather protection Not applicable. n/a Not applicable.					
PO10 The layout and design of the site: (a) promotes safe and AO10.1 The development incorporates covered walkways and ramps on site for weather protection Not applicable.	If for	Residential care facility			
The layout and design of the site: Covered walkways and ramps on site for weather protection		-		n/a	Not applicable
site: covered walkways and ramps on site for weather protection	1				
(a) promotes safe and on site for weather protection		, sat and accign of the			
	1	promotes safe and			
	` '	easy pedestrian, cycle	between all buildings.		

Performan	ce outcomes	Acceptable outcomes	Complies	Comments
(b) defin	mobility device ement; les areas of estrian movement;	AO10.2 Pedestrian paths include navigational signage at intersections.	n/a	Not applicable.
and (c) assis and v	ets in navigation way finding. Residential care	AO10.3 Buildings, dwellings and accommodation units include identification signage at entrances.	n/a	Not applicable.
assessable de assessment b	rement facility is evelopment additional enchmarks are er "for assessable	AO10.4 An illuminated sign and site map is provided at the main site entry.	n/a	Not applicable.
		AO10.5 Buildings, structures and pathways associated with a Residential care facility or Retirement facility are not located on land with a gradient greater than 8%.	n/a	Not applicable.
If for Home	e based business			
compatible form, chara	ed businesses are with the built acter and amenity urrounding area,	AO11.1 The Home based business is located within a dwelling house or outbuilding associated with a dwelling house.	n/a	Not applicable.
having rega (a) size		AO11.2 The Home based business does not occupy a gross floor area of more than 50m ² .	n/a	Not applicable.
and	ber of employees; s of operation.	AO11.3 No more than 1 person (other than the residents of the site) is employed by the Home based business at any one time.	n/a	Not applicable.
		AO11.4 The Home based business, unless a home office, bed and breakfast or farm stay, does not operate outside the hours of 7.00 am and 6.00 pm.	n/a	Not applicable.
		AO11.5 The Home based business does not involve the public display of goods external to the building.	n/a	Not applicable.
		AO11.6 The Home based business does not involve the repair, cleaning or servicing of any motors, vehicles or other machinery.	n/a	Not applicable.

	1		
Performance outcomes	Acceptable outcomes	Complies	Comments
	AO11.7 Any equipment or materials associated with the Home based business are screened from public view and adjacent properties by fencing or landscaping.	n/a	Not applicable.
	AO11.8 The business does not involve the use of power tools or similar noise generating devices.	n/a	Not applicable.
PO12 Home based businesses involving accommodation activities are appropriately scaled and designed to avoid	AO12.1 Home based businesses involving accommodation activities are limited to the scale specified in Table 9.3.1.3E.	n/a	Not applicable.
detrimental impacts on the amenity and privacy of surrounding residences.	AO12.2 A farm stay dwelling or accommodation unit is located within 20 metres of the primary dwelling house.	n/a	Not applicable.
	AO12.3 A farm stay is setback 100 metres from any property boundary.	n/a	Not applicable.
	AO12.4 Entertainment and dining facilities associated with an accommodation activity are: (a) located at least 5 metres from the bedrooms of adjoining residences; and (b) located or screened so that they do not directly overlook private open space areas of adjoining properties.	n/a	Not applicable.
If for Rural workers' accomm			
PO13 The Rural workers' accommodation is directly associated with an agricultural based rural activity on the same premises and is commensurate with the scale of agricultural operations.	AO13.1 A Rural workers' accommodation building is limited to the accommodation of: (a) one rural worker for every 50 hectares; and (b) a maximum of ten rural workers in total.	n/a	Not applicable.
	AO13.2 The agricultural based rural activity is a minimum of 50 hectares in area.	n/a	Not applicable.

Performance outcomes	Acceptable outcomes	Complies	Comments
PO14 Rural workers' accommodation is provided with amenities commensurate with the: (a) needs of the employees; and	AO14.1 The Rural workers' accommodation is: (a) for permanent occupation; and (b) fully self-contained. OR	n/a	Not applicable.
(b) permanent or seasonal nature of the employment.	AO14.2 The Rural workers' accommodation: (a) is for seasonal occupation (up to 3 months); (b) shares facilities with an existing Dwelling house or Caretaker's residence; and (c) is located within 100 metres of the Dwelling house or Caretaker's residence.	n/a	Not applicable.
For assessable developmen If for Caretaker's Accommod			
PO15 The inclusion of Caretaker's	AO15 No acceptable outcome is	n/a	Not applicable.
accommodation on the site is necessary for the operation of the primary use, having regard to: (a) hours of operation; (b) nature of the use; (c) security requirements; (d) site location and access; and (e) proximity to other land uses.	provided.		
If for Residential care facility			
PO16 Retirement facilities include a range of housing designs and types that: (a) meet the needs of residents; (b) allow for 'ageing in place'; (c) consider differing mobility needs; (d) accommodate differing financial situations; and (e) cater for different	AO16 No acceptable outcome is provided.	n/a	Not applicable.
household types.			

Perf	ormance outcomes	Acceptable outcomes	Complies	Comments
If for	r Tourist park			
appr prov conv attra	Tourist park is opriately located to ide park users with renient access to tourist ctions, community ties and infrastructure.	AO17 No acceptable outcome is provided.	n/a	Not applicable.
acco	density of symmodation provided in the Tourist park: is commensurate with the size and utility of the site; is consistent with the scale and character of development in the surrounding area; ensures sufficient infrastructure and services can be provided; does not adversely impact on the existing amenity of nearby	AO18.1 Where park areas are proposed to exclusively accommodate caravans, motor homes, tents or cabins, accommodation site densities do not exceed: (a) 40 caravan or motor home sites per hectare of the nominated area(s); or (b) 60 tent sites per hectare of the nominated area(s); or (c) 10 cabins (maximum 30m² gross floor area per cabin) per hectare of the nominated	n/a	Not applicable.
(e) (f)	uses; ensures a high level of amenity is enjoyed by residents of the site; and does not place undue pressure on environmental processes in the	area(s). AO18.2 Where park areas are proposed to be used for any combination of caravans, motor homes, tents or cabins, then the lowest applicable density identified by AO18.1 shall be applied to the nominated area(s).	n/a	Not applicable.
PO1		area(s). AO19.1	n/a	Not applicable.
	ommodation sites are gned and located: to provide sufficient land for necessary services and infrastructure;	A minimum of 50% of provided caravan and motor home accommodation sites have a concrete slab with a minimum length of 6 metres and a minimum width of 2.4 metres.		
(c)	to achieve sufficient separation between land uses; is consistent with the scale and character of development in the	AO19.2 Caravan, motor home, tent and cabin accommodation sites are set back a minimum of:	n/a	Not applicable.
(d)	development in the surrounding area; and to prevent amenity and privacy impacts on nearby land uses.	 (a) 2 metres from an internal road; and (b) 1.5 metres from the side and rear boundaries of the site. 		

Performance outcomes	Acceptable outcomes	Complies	Comments
PO20 A Tourist park is provided with sufficient and appropriately located refuse	AO20.1 A central refuse collection area is provided to service all accommodation sites.	n/a	Not applicable.
collection areas.	AO20.2 The refuse collection area must be kept in a sanitary condition at all times with all refuse stored in weather-proof and securable receptacles to prevent them from attracting vermin and wildlife.	n/a	Not applicable.
	AO20.3 The refuse collection area is constructed on an impervious surface such as a concrete slab.	n/a	Not applicable.
	AO20.4 A water connection is provided within the refuse collection area to facilitate cleaning of receptacles and the collection area.	n/a	Not applicable.
	AO20.5 Refuse collection areas are located a minimum of 10 metres from any recreational areas, communal cooking facilities and accommodation sites.	n/a	Not applicable.

Table 9.3.1.3B - Minimum site area and minimum site frontage

Use	Minimum site area	Minimum frontage
Dual occupancy	 (a) 600m² in the Medium density residential zone; or (b) 1,000m² in the Low density residential zone; or (c) 600m² in the Centre zone. 	20 metres
Home based business	600m ²	-
Multiple dwelling	800m ²	20 metres
Residential care facility	2,000m ²	30 metres
Retirement facility	2,000m ²	30 metres
Rooming accommodation	800m ²	20 metres
Short-term accommodation	800m ²	20 metres
Tourist park	1 hectare	50 metres
Caravan and motor home sites	100m ² including sufficient area for the parking of a motor vehicle.	10 metres to an internal road
Tent sites	40m² including sufficient area for the parking of a motor vehicle.	6 metres to an internal road
Cabin sites	130m² including sufficient area for the parking of a motor vehicle.	10 metres to an internal road

Table 9.3.1.3C - Communal open space

Use	Minimum area	Minimum dimension	Design elements
Multiple dwelling	50m ²	5 metres	 Provides for clothes drying and recreational facilities; One continuous area; and Separated from any habitable room by a minimum of 3 metres.
Retirement facility or Residential care facility	Indoor commu specified belo		l communal open space as
Rooming accommodation	Rate of 5m ² per resident	5 metres	 One continuous area; 20% shaded; and 10% of the provided area is screened for use for clothes drying.
Indoor communal space	Rate of 1m ² per resident and 40m ²	-	Located centrally; andProvides a range of facilities.
Communal open space	30% site area and 50m²	5 metres	Provided at ground level.

Use	Minimum area	Minimum dimension	Design elements
Short-term accommodation	50m ² and 20% site area	5 metres	 Located at ground level; One continuous area; and 10% of the provided area is screened for use for clothes drying.
Tourist park	Includes at least each of the below communal facilities.		 Located within 100 metres of the sites they serve (unless private recreation facilities are provided); and Separated from any site by a minimum of 10 metres.
Covered cooking area	50m ²	-	Including barbeque and dish washing facilities
Laundry	-	-	Including clothes drying facilities.
Recreational open space	Rate of 5m ² per site	-	 Including a children's playground.

Note—Provision of communal open space for a Multiple dwelling is not required by **Table 9.3.1.3C** where more than 75% have access to ground floor private open space.

Note—For a Tourist park, the calculation of recreational open space is inclusive of pool areas, sporting facilities, such as football fields and tennis courts, and any unobstructed grassed areas having a minimum dimension of 3 metres that are provided in addition to accommodation sites for recreational purposes. Planted landscape areas and vegetated areas are excluded from the calculation.

Note—Indoor communal space may include lounge areas, a library / reading room, a TV/games/recreation room, meeting space/s, hairdresser or a convenience store.

Table 9.3.1.3D - Private open space

Use	Minimum area per dwelling or accommodation unit	Minimum dimension	Design elements
Caretaker's accommodation	As specified below	<i>1</i> .	
Ground level	50m ²	5 metres	 Provided as unobstructed area; and Directly accessible from the main living area.
Above ground level	15m ²	2.5 metres	Provided as a balcony.
Outdoor service court	5m ²	-	Provided for clothes drying
Dual occupancy	40m ²	3 metres	 Located at ground level. 20% shaded; and Accessed from the main living area of the dwelling.

Use	Minimum area per dwelling or accommodation unit	Minimum dimension	Design elements	
Dwelling house	40m ²	3 metres	 Located at ground level; 20% shaded; and Accessed from the main living area of the dwelling. 	
Home based business	40m ²	3 metres	 Located at ground level; 20% shaded; and Accessed from the main living area of the dwelling. 	
Ground level	15m ²	3 metres	 20% shaded; and Directly accessible from the main living area. 	
Above ground level	10m ²	3 metres	Directly accessible from the main living area.	
Multiple dwelling	As specified below.			
Ground level	35m ²	3 metres	 20% shaded; and Directly accessible from the main living area. 	
Above ground level	15m ²	3 metres	Directly accessible from the main living area.	
Residential care facility	6m ²	2 metres	 Provided as a shaded courtyard or balcony; and Directly accessible from the main living area. 	
Retirement facility	As specified below	<i>I</i> .		
Ground level	20m ²	3 metres	 Provided as a courtyard or similar space; Grade does not exceed 5%; and Directly accessible from the main living area at ground level. 	

Use	Minimum area per dwelling or accommodation unit	Minimum dimension	Design elements	
Above ground level	6m ²	2 metres	 Provided as a balcony or similar space; and Directly accessible from the main living area. 	
Rooming accommodation	As specified below.			
Short-term accommodation	As specified below	<i>1</i> .		
Ground level	15m ²	3 metres	 20% shaded; and Directly accessible from the main living area. 	
Above ground level	10m ²	3 metres	Directly accessible from the main living area.	

Note—For Caretaker's accommodation, the outdoor service court may form part of the provided private open space.

Table 9.3.1.3E – Maximum scale of accommodation activities associated with a Home based business

Design	Maximum number of rooms	Maximum number of guests
Bed and breakfast	3 rooms for guest accommodation	6 guests at any one time
Farm stay	1 farm stay dwelling or accommodation unit in addition to the primary dwelling	10 guests at any one time

9.4.2 Landscaping code

9.4.2.1 Application

This code applies where it is identified in the assessment benchmarks for assessable development and requirements for accepted development column of an assessment table in Part 5 of the planning scheme.

9.4.2.2 Purpose

- (1) The purpose of the Landscaping code is to ensure all development is landscaped to a standard that:
 - (a) complements the scale and appearance of the development;
 - (b) protects and enhances the amenity and environmental values of the site;
 - (c) complements and enhances the streetscape and local landscape character; and
 - (d) ensures effective buffering of incompatible land uses to protect local amenity.
- (2) The purpose of the code will be achieved through the following overall outcomes:
 - (a) Landscaping is a functional part of development design and is commensurate with the intended use;
 - (b) Landscaping accommodates the retention of existing significant on site vegetation where appropriate and practical;
 - (c) Landscaping treatments complement the scale, appearance and function of the development;
 - (d) Landscaping contributes to an attractive streetscape;
 - (e) Landscaping enhances the amenity and character of the local area;
 - (f) Landscaping enhances natural environmental values of the site and the locality;
 - (g) Landscaping provides effective screening both on site, if required, and between incompatible land uses:
 - (h) Landscaping provides shade in appropriate circumstances;
 - (i) Landscape design enhances personal safety and reduces the potential for crime and vandalism; and
 - (j) Intensive land uses incorporate vegetated buffers to provide effective screening of buildings, structures and machinery associated with the use.

9.4.2.3 Criteria for assessment

Table 9.4.2.3A—Landscaping code - For accepted development subject to requirements and assessable development

Performance outcomes	Acceptable outcomes	Complies	Comments		
For accepted development s	For accepted development subject to requirements and assessable development				
PO1 Development, other than in the Rural zone, includes landscaping that: (a) contributes to the landscape character of the Shire; (b) compliments the character of the immediate surrounds; (c) provides an appropriate balance between built and natural elements; and (d) provides a source of visual interest.	AO1 Development, other than in the Rural zone, provides: (a) a minimum of 10% of the site as landscaping; (b) planting in accordance with Planning Scheme Policy 6 - Landscaping and preferred plant species; (c) for the integration of retained significant vegetation into landscaping areas; (d) on-street landscaping works in accordance with the Design Guidelines set out in Section D9 Landscaping, of the Planning Scheme Policy 4 - FNQROC Regional Development Manual. Note—Where development exceeds a site cover of 90%, areas of landscaping may be provided above ground level to achieve a total supply of landscaping equivalent to 10% of the site area.		An appropriate amount of landscaping has been conditioned along the front boundary of the site for the dual occupancy component of the development. No landscaping is considered necessary for the RoL component.		

Performance outcomes	Acceptable outcomes	Complies	Comments
PO2 Development, other than in the Rural zone, includes landscaping along site frontages that: (a) creates an attractive streetscape; (b) compliments the character of the immediate surrounds; (c) assists to break up and soften elements of built form; (d) screen areas of limited visual interest or servicing; (e) provide shade for pedestrians; and (f) includes a range and variety of planting.	Development, other than in the Rural zone, includes a landscape strip along any site frontage: (a) with a minimum width of 2 metres where adjoining a car parking area; (b) with a minimum width of 1.5 metres in all other locations; and (c) in accordance with Planning Scheme Policy 6 - Landscaping and preferred plant species. Note—Where development is setback from a frontage less than 1.5 metres, the setback area is provided as a landscape strip		See comment for AO1.
PO3 Development includes landscaping and fencing along side and rear boundaries that: (a) screens and buffer	AO3.1 Development provides landscape treatments along side and rear boundaries in accordance with Table 9.4.2.3B.	•	See comment for AO1.
land uses; (b) assists to break up and soften elements of built form; (c) screens areas of limited visual interest; (d) preserves the amenity of sensitive land uses; and (e) includes a range and variety of planting.	AO3.2 Shrubs and trees provided in landscape strips along side and rear boundaries: (a) are planted at a maximum spacing of 1 metre; (b) will grow to a height of at least 2 metres; (c) will grow to form a screen of no less than 2 metres in height; and (d) are mulched to a minimum depth of 0.1 metres with organic mulch.		See comment for AO1.

Performance outcomes	Acceptable outcomes	Complies	Comments
	AO3.3 Any landscape strip provided along a side or rear boundary is designed in accordance with Planning Scheme Policy 6 - Landscaping and preferred plant species.	•	See comment for AO1.
PO4 Car parking areas are improved with a variety of landscaping that: (a) provides visual interest; (b) provides a source of shade for pedestrians; (c) assists to break up and soften elements; and (d) improves legibility.	Landscaping is provided in car parking areas which provides: (a) a minimum of 1 shade tree for every 4 parking spaces, or part thereof, where the car parking area includes 12 or more spaces; (b) a minimum of 1 shade tree for every 6 parking spaces, or part thereof, otherwise; and (c) where involving a car parking area in excess of 500m²: (i) shade structures are provided for 50% of parking spaces; and (ii) a minimum of 10% of the parking area as landscaping. Note—Where a shade structure is provided over part of a car parking area, shade tree planting is not required in this area of the car parking area.		See comment for AO1.
	AO4.2 Landscaping in car parking areas is designed in accordance with Planning Scheme Policy 6 - Landscaping and preferred plant species.	•	See comment for AO1.

Performance outcomes	Acceptable outcomes	Complies	Comments
PO5 Landscaping areas include a range and variety of planting that: (a) is suitable for the intended purpose	AO5.1 Plant species are selected from the Plant Schedule in Planning Scheme Policy 6 - Landscaping and preferred plant species.	•	See comment for AO1.
and local conditions; (b) contributes to the natural character of the Shire; (c) includes native species; (d) includes locally endemic species, where practical; and (e) does not include invasive plants or weeds.	AO5.2 A minimum of 25% of (new and existing) plants is provided as larger, advanced stock with a minimum plant height of 0.7 metres and mulched to a minimum depth of 0.1 metres with organic mulch.	•	See comment for AO1.
PO6 Landscaping does not impact on the ongoing provision of infrastructure and services to the Shire.	AO6.1 Tree planting is a minimum of (a) 2 metres from any underground water, sewer, gas, electricity or telecommunications infrastructure; and (b) 4 metres from any inspection chamber.	n/a	Not applicable.
	AO6.2 Vegetation below or within 4 metres of overhead electricity lines and power poles has a maximum height of 3.5 metres at maturity.	n/a	Not applicable.
	AO6.3 Vegetation adjoining an electricity substation boundary, at maturity, will have: (a) a height of less than 4 metres; and (b) no foliage within 3 metres of the substation boundary, unless the substation has a solid wall along any boundary.	n/a	Not applicable.
For assessable development			

Performance outcomes	Acceptable outcomes	Complies	Comments
PO7	AO7	n/a	Not applicable.
Landscaping areas are designed to:	No acceptable outcome is provided.		
(a) be easily maintained throughout the ongoing use of the site;			
(b) allow sufficient area and access to sunlight and water for plant growth;			
(c) not cause a nuisance to occupants of the site or members of the public; and			
(d) maintain or enhance the safety of pedestrians through the use of Crime Prevention Through Environmental Design principles.			

Table 9.4.2.3B—Side and rear boundary landscape treatments

Fable 9.4.2.3B—Side and rear boundary landscape treatments			
Location or use	Landscape Strip Minimum Width	Screen Fencing Minimum Height	Extent of treatment
Where car parking, servicing or manoeuvring areas adjoin a side or rear boundary	1 metre	Not applicable	To the extent these areas adjoin the boundary
Where involving a use other than a dwelling house on a site with a common boundary with land in the Low density residential zone, the Medium density residential zone or the Rural residential zone:	1.5 metres	1.8 metres	Along the common boundary.
Development for an industrial activity which has a common boundary with land not within the Industry zone	2 metres	1.8 metres	Along the common boundary
Development involving (a) Tourist park not in the Rural zone (b) Sales office (c) Multiple dwelling (d) Residential care facility; or (e) Dual occupancy	Not applicable	1.8 metres	Along all side and rear boundaries and between dwellings for a Dual occupancy.
Development involving (a) Tourist park in the Rural zone (b) Service station (c) Car wash; or (d) Utility installation	2 metres	Not applicable	Along all side and rear boundaries
For: (a) waste storage; (b) equipment; (c) servicing areas; and (d) private open space and site facilities associated with Caretaker's accommodation.	Not applicable	1.8 metres	To prevent visibility

Note—Where more than one landscape treatment is applicable to a development in the above table, the development is to provide a landscape treatment that satisfies all applicable minimum specifications.

9.4.3 Parking and access code

9.4.3.1 Application

This code applies to assessing development where it is identified in the assessment benchmarks for assessable development and requirements for accepted development column of an assessment table in Part 5 of the planning scheme.

9.4.3.2 Purpose

- (1) The purpose of the Parking and access code is to ensure:
 - (a) parking areas are appropriately designed, constructed and maintained;
 - (b) the efficient functioning of the development and the local road network; and
 - (c) all development provides sufficient parking, loading/service and manoeuvring areas to meet the demand generated by the use.
- (2) The purpose of the code will be achieved through the following overall outcomes:
 - (a) Land uses have a sufficient number of parking and bicycle spaces designed in a manner to meet the requirements of the user;
 - (b) Parking spaces and associated manoeuvring areas are safe, functional and provide equitable access;
 - (c) Suitable access for all types of vehicles likely to utilise a parking area is provided in a way that does not compromise the safety and efficiency of the surrounding road network;
 - (d) Premises are adequately serviced to meet the reasonable requirements of the development; and
 - (e) End of trip facilities are provided by new major developments to facilitate alternative travel modes.

9.4.3.3 Criteria for assessment

Table 9.4.3.3A—Parking and access code – For accepted development subject to requirements and assessable development

Performance outcomes	Acceptable outcomes	Complies	Comments		
For accepted development subject to requirements and assessable development					
Car parking spaces					

B. of a market and a second and a second a secon	A	0	0
Performance outcomes	Acceptable outcomes	Complies	Comments
PO1 Development provides sufficient car parking to accommodate the demand likely to be generated by the use, having regard to the: (a) nature of the use; (b) location of the site; (c) proximity of the use to public transport services; (d) availability of active transport infrastructure; and (e) accessibility of the use to all members of the community.	The number of car parking spaces provided for the use is in accordance with Table 9.4.3.3B . Note—Car parking spaces provided for persons with a disability are to be considered in determining compliance with AO1.		Complies - Visitors will park either in the second undercover car park of each unit or in a tandem arrangement in the driveway.
Vehicle crossovers			
PO2 Vehicle crossovers are provided to:: (a) ensure safe and efficient access between the road and premises; (b) minimize interference with the function and operation of roads; and	AO2.1 Vehicular access to/from Council roads is designed and constructed in accordance with the Standard drawings in Planning Scheme Policy 4 - FNQROC Regional Development Manual.	•	Will be conditioned to comply.
(c) minimise pedestrian to vehicle conflict.	AO2.2 Development on a site with two or more road frontages provides vehicular access from: (a) the primary frontage where involving Community activities or Sport and recreation activities, unless the primary road frontage is a Statecontrolled road; or (b) from the lowest order road in all other instances.		Complies.

Performance outcomes	Acceptable outcomes	Complies	Comments
	AO2.3 Vehicular access for particular uses is provided in accordance with Table 9.4.3.3E.	•	Complies.
PO3 Access, manoeuvring and car parking areas include appropriate pavement treatments having regard to: (a) the intensity of anticipated vehicle movements; (b) the nature of the use that they service; and (c) the character of the surrounding locality.	AO3 Access, manoeuvring and car parking areas include pavements that are constructed in accordance with Table 9.4.3.3C.	•	Complies.
For assessable development			
Parking area location and des	sign		
PO4 Car parking areas are located and designed to: (a) ensure safety and efficiency in operation; and (b) be consistent with the	AO4.1 Car parking spaces, access and circulation areas have dimensions in accordance with AS/NZS 2890.1 Off-street car parking.	•	Complies.
character of the surrounding locality.	AO4.2 Disabled access and car parking spaces are located and designed in accordance with AS/NZS 2890.6 Parking facilities - Off-street parking for people with disabilities.	n/a	
	AO4.3 The car parking area includes designated pedestrian routes that provide connections to building entrances.	•	Complies.

Performance outcomes	Acceptable outcomes	Complies	Comments
	AO4.4 Parking and any set down areas are: (a) wholly contained within the site; (b) visible from the street where involving Commercial activities, Community activities or a use in the Recreation and open space zone; (c) are set back behind the main building line where involving a Dual occupancy, Multiple dwelling, Residential care facility or Retirement facility; and (d) provided at the side or rear of a building in all other instances.		Complies.
Site access and manoeuvring			
PO5 Access to, and manoeuvring within, the site is designed and located to: (a) ensure the safety and efficiency of the external road network; (b) ensure the safety of pedestrians; (c) provide a functional and convenient layout; and (d) accommodate all vehicles intended to use the site.	AO5.1 Access and manoeuvrability is in accordance with: (a) AS28901 – Car Parking Facilities (Off Street Parking); and (b) AS2890.2 – Parking Facilities (Off-street Parking) Commercial Vehicle Facilities. Note—Proposal plans should include turning circles designed in accordance with AP34/95 (Austroads 1995) Design Vehicles and Turning Path Templates.	n/a	

Performance outcomes	Acceptable outcomes	Complies	Comments
	AO5.2 Vehicular access has a minimum sight distance in accordance with Part 5 of AUSTROADS.	•	Complies.
	AO5.3 Vehicular access is located and designed so that all vehicles enter and exit the site in a forward gear.	Complies with AO5.	Vehicles will not be able to exit the site in a forward gear, however the 7.5 metre wide sealed shoulder of Constance Street will allow the cars the safely reverse and turn. The development complies with PO5.
	AO5.4 Pedestrian and cyclist access to the site: (a) is clearly defined; (b) easily identifiable; and (c) provides a connection between the site frontage and the entrance to buildings and end of trip facilities (where provided).	n/a	
PO6 Development that involves an internal road network ensures that it's design: (a) ensure safety and efficiency in operation; (b) does not impact on the amenity of residential	AO6.1 Internal roads for a Tourist park have a minimum width of: (a) 4 metres if one way; or (b) 6 metres if two way.	n/a	

Perf	ormance outcomes	Acceptable outcomes	Complies	Comments
(c)	uses on the site and on adjoining sites, having regard to matters of: (i) hours of operation; (ii) noise (iii) light; and (iv) odour; accommodates the nature and volume of vehicle movements anticipated to be generated by the use; allows for convenient access to key on-site features by pedestrians, cyclists and motor vehicles; and	For a Tourist park, internal road design avoids the use of cul-desacs in favour of circulating roads, where unavoidable, cul-de-sacs provide a full turning circle for vehicles towing caravans having: (a) a minimum approach and departure curve radius of 12 metres; and (b) a minimum turning circle radius of 8 metres.	n/a	
(e)	in the Rural zone, avoids environmental degradation.	AO6.3 Internal roads are imperviously sealed and drained, apart from those for an Energy and infrastructure activity or Rural activity.	n/a	
		AO6.4 Speed control devices are installed along all internal roads, apart from those for an Energy and infrastructure activity or Rural activity, in accordance with Complete Streets.	n/a	
		AO6.5 Internal roads, apart from those for an Energy and infrastructure activity or Rural activity, are illuminated in accordance with AS 4282 (as amended) - Control of Obtrusive effects of outdoor lighting.	n/a	

Performance outcomes	Acceptable outcomes	Complies	Comments
	AO6.6 Where involving an accommodation activity, internal roads facilitate unobstructed access to every dwelling, accommodation unit, accommodation site and building by emergency services vehicles.	n/a	
	AO6.7 For an Energy and infrastructure activity or Rural activity, internal road gradients: (a) are no steeper than 1:5; or (b) are steeper than 1:5 and are sealed.	n/a	
Servicing			
PO7 Development provides accemaneuvering and service areas on site that: (a) accommodate a service vehicle commensurate with the likely demand generated by the use; (b) do not impact on the safety or efficiency of internal car parking or maneuvering areas; (c) do not adversely imparon the safety or efficiency of the road	service and waste disposal areas are located: (a) on the site; (b) to the side or rear of the building, behind the main building line; (c) not adjacent to a site boundary	n/a	
network; (d) provide for all servicin functions associated with the use; and (e) are located and designed to minimise their impacts on	AO7.2	n/a	

Performance outcomes	Acceptable outcomes	Complies	Comments
adjoining sensitive land uses and streetscape quality.	AO7.3 Development provides a servicing area, site access and maneuvering areas to accommodate the applicable minimum servicing vehicle specified in Table 9.4.3.3B.	n/a	
Maintenance			
PO8 Parking areas are used and maintained for their intended purpose.	AO8.1 Parking areas are kept and used exclusively for parking and are maintained in a suitable condition for parking and circulation of vehicles.	n/a	
	AO8.2 All parking areas will be compacted, sealed, drained, line marked and maintained until such time as the development ceases.	n/a	
End of trip facilities			
PO9 Development within the Centre zone; Industry zone or Emerging community zone provides facilities for active transport users that:	AO9.1 The number of bicycle parking spaces provided for the use is in accordance with Table 9.4.3.3D.	n/a	
 (a) meet the anticipated demand generated from the use; (b) comprise secure and convenient bicycle parking and storage; and (c) provide end of trip facilities for all active transport users. 	AO9.2 End of trip facilities are provided in accordance with Table 9.4.3.3D.	n/a	

If for Educational establishment or Child care centre where involving more than 100 vehicle movements per day or Renewable energy facility, Sport and recreation activities or Tourist park

Performance outcomes	Acceptable outcomes	Complies	Comments
PO10 The level of traffic generated by the development on the surrounding local road network must not result in unacceptable impacts on adjacent land and local road users. If for Educational establishmy ehicle movements per day cor Tourist park			
PO11 The level of traffic generated by the development on the surrounding local road network must not result in unacceptable impacts on adjacent land and local road users.	AO11 A traffic impact report is prepared by a suitably qualified person that identifies: (d) the expected traffic movements to be generated by the facility; (e) any associated impacts on the road network; and (f) any works that will be required to address the identified impacts.	n/a	

Table 9.4.3.3B—Vehicle Parking and Service Vehicle Space Requirements

Definition	Minimum number of Car parking spaces	Minimum Service Vehicle Space Provision
Dual occupancy	One covered space per dwelling; and One visitor space.	Nil.

Table 9.4.3.3C—Pavement Standards for Access, Manoeuvring and Car Parking areas

Zone	Compacted Gravel Base (minimum thickness)	Surfacing Options	
All development other than dwelling house			
All zones other than the Conservation zone or the	75mm	Reinforced concrete with a minimum thickness of: • 100mm for parking areas; and • 150mm for access ways.	
Rural zone	150mm	Asphalt with a minimum thickness of 25mm	
	150mm	Two coat sprayed bitumen seal	
	150mm	Concrete pavers	
Conservation zone or Rural zone	Not applicable	Minimum 150mm thickness compacted gravel suitable for all weather and dust free	
Dwelling house			
All zones	75mm	Reinforced concrete with a minimum thickness of: • 100mm for parking areas; and • 150mm for access ways.	
	150mm	Asphalt with a minimum thickness of 25mm	
	150mm	Two coat sprayed bitumen seal	
	150mm	Concrete pavers	
	Not applicable	Minimum 150mm thickness compacted gravel suitable for all weather and dust free	

Note—Where more than one surfacing option is listed, any one of the treatments listed may be provided.

Table 9.4.3.3E—Vehicular Access for Specific Uses

Use	Design
Dwelling house	A secondary dwelling shares a vehicle crossover with the Dwelling house.
Car wash	Site access involves: (a) a maximum width of 9 metres of any vehicle crossover across a footpath;
Service station	 (b) a minimum separation of 12 metres between any vehicle crossover and a road intersection; (c) a separate entrance and exit; and (d) a minimum separation between vehicle crossovers of 14 metres.
Industrial activities	Each lot is provided with no more than one access point every 15 metres.
Roadside stall	A single vehicular access point is provided to the site.
Tourist park	(a) a single vehicular access point is provided to the site; and(b) no accommodation site has individual vehicular access.

9.4.4 Reconfiguring a lot code

9.4.4.1 Application

- (1) This code applies to assessing development where:
 - (a) for Reconfiguring a lot; and
 - (b) it is identified in the assessment benchmarks for assessable development and requirements for accepted development column of an assessment table in Part 5 of the planning scheme.

9.4.4.2 Purpose

- (1) The purpose of the Reconfiguring a lot code is to ensure that land is:
 - (a) arranged in a manner which is consistent with the intended scale and intensity of development within the area;
 - (b) provided with access to appropriate movement and open space networks; and
 - (c) contributes to housing diversity and accommodates a range of land uses.
- (2) The purpose of the code will be achieved through the following overall outcomes:
 - (a) Subdivision of land achieves the efficient use of land and the efficient provision of infrastructure and transport services;
 - (b) Lots are of a suitable size and shape for the intended or potential use having regard to the purpose and overall outcomes of the relevant zone or precinct.
 - (c) Subdivision of land creates lots with sufficient area and dimensions to accommodate the ultimate use, meet user requirements, protect environmental features and account for site constraints;
 - (d) A range and mix of lot sizes is provided to facilitate a variety of industry and housing types;
 - (e) Subdivision design incorporates a road network that provides connectivity and circulation for vehicles and provide safe and efficient access for pedestrians, cyclists and public transport;
 - (f) Subdivision design provides opportunities for walking and cycling for recreation and as alternative methods of travel;
 - (g) Subdivision of land provides and integrates a range of functional parkland, including local and district parks and open space links for the use and enjoyment of the residents of the locality and the shire;
 - (h) Subdivision of land contributes to an open space network that achieves connectivity along riparian corridors and between areas with conservation values;
 - (i) Subdivision within the Rural zone maintains rural landholdings in viable parcels;
 - (j) Land in historical townships is not reconfigured to be used for urban purposes; and
 - (k) Residential subdivision and greenfield development is designed to consider and respect:
 - i. topography;
 - ii. climate responsive design and solar orientation;
 - iii. efficient and sustainable infrastructure provision;
 - iv. environmental values;
 - v. water sensitive urban design;
 - vi. good quality agricultural land; and
 - vii. the character and scale of surrounding development.

9.4.4.3 Criteria for assessment

Table 9.4.4.3A—Reconfiguring a lot code – For assessable development

Perf	ormance outcomes	Acceptable outcomes	Complies	Comments
Area	a and frontage of lots			
PO1 Lots	-	AO1.1 Lots provide a minimum area and frontage in accordance with Table 9.4.4.3B.		Complies.
	ting buildings and easeme			Commiss
cont exist	onfiguring a lot which ains existing land uses or ting buildings and ctures ensures: new lots are of sufficient	AO2.1 Each land use and associated infrastructure is contained within its individual lot.	, v	Complies.
(b)	area and dimensions to accommodate existing land uses, buildings and structures; and any continuing use is not compromised by the reconfiguration.	AO2.2 All lots containing existing buildings and structures achieve the setback requirements of the relevant zone.	*	Complies.

Performance outcomes	Acceptable outcomes	Complies	Comments
PO3 Reconfiguring a lot which contains an existing easement ensures: (a) future buildings, structures and accessways are able to be sited to avoid the easement; and (b) the reconfiguration does not compromise the purpose of the easement or the continued operation of any infrastructure contained within the easement.	AO3 No acceptable outcome is provided.	n/a	
Boundary realignment			
PO4 The boundary realignment retains all attendant and existing infrastructure connections and potential connections.	AO4 No acceptable outcome is provided.	n/a	
Access and road network			
PO5 Access to a reconfigured lot (including driveways and paths) must not have an adverse impact on: (a) safety; (b) drainage; (c) visual amenity; (d) privacy of adjoining premises; and (e) service provision.	AO5 No acceptable outcome is provided.	•	Complies.

Perf	ormance outcomes	Acceptable outcomes	Complies	Comments
PO6 Recc acce that: (a) (b) (c)	onfiguring a lot ensures that ss to a lot can be provided is consistent with that provided in the surrounding area; maximises efficiency and safety; and is consistent with the nature of the intended use of the lot. The Parking and access code should sidered in demonstrating compliance	AO6 Vehicle crossover and access is provided in accordance with the design guidelines and specifications set out in Planning Scheme Policy 4 – FNQROC Regional Development Manual.	V	Complies.
PO7 Road desig (a) (b) (c) (d)	ds in the Industry zone are gned having regard to: the intended use of the lots; the existing use of surrounding land; the vehicular servicing requirements of the intended use; the movement and turning requirements of B-Double vehicles. The Parking and access code should sidered in demonstrating compliance	AO7 No acceptable outcome is provided.	n/a	
Rear	· lots			
PO8 Rear (a)	lots are designed to: provide a high standard of amenity for residents and other users of the	AO8.1 Rear lots are designed to facilitate development that adjoins or overlooks a park or open space.	n/a	
(b)	site; provide a high standard of amenity for adjoining properties; and	AO8.2 No more than two rear lots are created behind any lot with a road frontage.	n/a	

Performance outcomes	Acceptable outcomes	Complies	Comments
(c) not adversely affect the safety and efficiency of the road from which access is gained.	AO8.3 Access to lots is via an access strip with a minimum width of: (a) 4 metres where in the Low density residential zone or Medium density residential zone; or (b) 8 metres otherwise.	n/a	
	AO8.4 A single access strip is provided to a rear lot along one side of the lot with direct frontage to the street. Note—Figure A provides further guidance in relation to the desired outcome.	n/a	
	AO8.5 No more than 1 in 10 lots created in a new subdivision are rear lots.	n/a	
	AO8.6 Rear lots are not created in the Centre zone or the Industry zone.	n/a	
Crime prevention and commun	nity safety		
PO9 Development includes design features which enhance public safety and seek to prevent opportunities for crime, having regard to: (a) sightlines; (b) the existing and intended pedestrian movement network; (c) the existing and intended land use pattern; and (d) potential entrapment locations.	AO9 No acceptable outcome is provided.	n/a	
Pedestrian and cycle moveme	nt network		

Performance outcomes	Acceptable outcomes	Complies	Comments
PO10 Reconfiguring a lot must assist in the implementation of a Pedestrian and cycle movement network to achieve safe, attractive and efficient pedestrian and cycle networks.	AO10 No acceptable outcome is provided.	n/a	
Public transport network			
PO11 Where a site includes or adjoins a future public transport corridor or future public transport site identified through a structure planning process, development: (a) does not prejudice the future provision of the identified infrastructure; (b) appropriately treats the common boundary with the future corridor; and (c) provides opportunities to integrate with the adjoining corridor where a it will include an element which will attract pedestrian movement.	AO11 No acceptable outcome is provided.	n/a	
Residential subdivision			
PO12 Residential lots are: (a) provided in a variety of sizes to accommodate housing choice and diversity; and (b) located to increase variety and avoid large areas of similar lot sizes.	AO12 No acceptable outcome is provided.	•	Complies.
Rural residential zone			
PO13 New lots are only created in the Rural residential zone where land is located within the 4,000m² precinct, the 1 hectare precinct or the 2 hectare precinct.	AO13 No acceptable outcome is provided.	n/a	
Additional provisions for greenfield development only			

Performance outcomes	Acceptable outcomes	Complies	Comments
PO14 The subdivision design provides the new community with a local identity by responding to: (a) site context (b) site characteristics (c) setting (d) landmarks (e) natural features; and (f) views.	AO14 No acceptable outcome provided.	n/a	
PO15 The road network is designed to provide a high level of connectivity, permeability and circulation for local vehicles, public transport, pedestrians and cyclists.	AO15 No acceptable outcome provided.	n/a	
PO16 The road network is designed to: (a) minimise the number of cul-de-sacs; (b) provide walkable catchments for all residents in cul-de-sacs; and (c) include open cul-de-sacs heads. Note—Figure B provides further guidance in relation to the desired outcome.	AO16 No acceptable outcome provided.	n/a	
PO17 Reconfiguring a lot provides safe and convenient access to the existing or future public transport network.	AO17 The subdivision locates 90% of lots within 400 metres walking distance of a future public transport route.	n/a	
PO18 The staging of the lot reconfiguration prioritises delivery of link roads to facilitate efficient bus routes.	AO18 No acceptable outcome provided.	n/a	
PO19 Provision is made for sufficient open space to: (a) meet the needs of the occupiers of the lots and	AO19.1 A minimum of 10% of the site area is dedicated as open space.	n/a	

Perf	ormance outcomes	Acceptable outcomes	Complies	Comments
(b)	to ensure that the environmental and scenic values of the area are protected; retain riparian corridors, significant vegetation and habitat areas and provides linkages between those areas; and	AO19.2 A maximum of 30% of the proposed open space can consist of land identified as significant vegetation or riparian corridor buffer.	n/a	
(c)	meet regional, district and neighbourhood open space requirements.			
PO2	2 0 network of parks and	AO20 No acceptable outcome	n/a	
	munity land is provided:	is provided.		
(a)	to support a full range of recreational and sporting activities;	ie promaca.		
(b)	to ensure adequate pedestrian, cycle and vehicle access;			
(c)	which is supported by appropriate infrastructure and embellishments;			
(d)	to facilitate links between public open spaces;			
(e)	which is co-located with other existing or proposed community infrastructure;			
(f)	which is consistent with the preferred open space network; and			
(g)	which includes a diversity of settings;			

Table 9.4.4.3B—Minimum area and dimensions for Reconfiguring a lot

Zone	Туре	Minimum area	Minimum frontage
Centre	All lots	800m ²	20 metres
Community facilities	All lots	Not specified	Not specified
Conservation	All lots	Not specified	Not specified
Emerging community	All lots	10 hectares	100 metres
Low density residential	Where greenfield	development	and connected to
	reticulated water a	nd sewerage	

Zone	Туре	Minimum	Minimum
		area	frontage
	Rear lot	800m ²	5 metres
	All other lots	350m ²	10 metres
	Where connected	to reticulated wat	er and sewerage
	Rear lot	800m ²	5 metres
	All other lots	600m ²	16 metres
	Where connected	to reticulated wat	er
	Rear lot	1,000m ²	5 metres
	All other lots	800m ²	16 metres
Medium density	Rear lot	600m ²	5 metres
residential	All other lots	400m ²	10 metres
Industry	All lots	1,500m ²	45 metres
Recreation and open space	All lots	Not specified	Not specified
Rural	All lots	60 hectares	400 metres
Rural residential	2 hectare precinct		
	All lots	2 hectares	60 metres
	1 hectare precinct		
	All lots	1 hectare	40 metres
	4,000m ² precinct		
	All lots	4,000m ²	40 metres

Figure A – Examples of access to rear lots


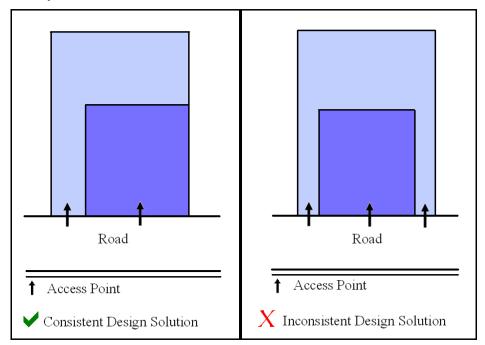


Figure B – Example of cul-de-sac design

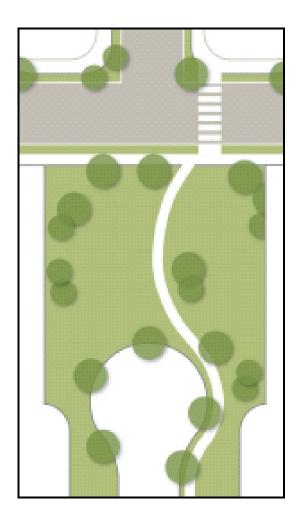

9.4.5 Works, services and infrastructure code

9.4.5.1 Application

(1) This code applies to assessing development where it is identified in the assessment benchmarks for assessable development and requirements for accepted development column of an assessment table in Part 5 of the planning scheme.

9.4.5.2 Purpose

- (1) The purpose of the Works, services and infrastructure code is to ensure that all development is appropriately serviced by physical infrastructure, public utilities and services and that work associated with development is carried out in a manner that does not adversely impact on the surrounding area.
- (2) The purpose of the code will be achieved through the following overall outcomes:
 - (a) Development provides an adequate, safe and reliable supply of potable, fire-fighting and general use water in accordance with relevant standards;
 - (b) Development provides for the treatment and disposal of wastewater and ensures there are no adverse impacts on water quality, public health, local amenity or ecological processes;
 - (c) Development provides for the disposal of stormwater and ensures that there are no adverse impacts on water quality or ecological processes;
 - (d) Development connects to the road network and any adjoining public transport, pedestrian and cycle networks while ensuring no adverse impacts on the safe, convenient and efficient operation of these networks;
 - (e) Development provides electricity and telecommunications services that meet its desired requirements:
 - (f) Development is connected to a nearby electricity network with adequate capacity without significant environment, social or amenity impact;
 - (g) Development does not affect the efficient functioning of public utility mains, services or installations;
 - (h) Infrastructure dedicated to Council is cost effective over its life cycle;
 - (i) Work associated with development does not cause adverse impacts on the surrounding area; and
 - (j) Development prevents the spread of weeds, seeds or other pests.

9.4.5.3 Criteria for assessment

Table 9.4.5.3 - Works, services and infrastructure code - For accepted development subject to requirements and assessable development

Performance outcomes	Acceptable outcomes	Complies	Comments			
For accepted development subject to requirements and assessable development						
Water supply						

Performance outcomes	Acceptable outcomes	Complies	Comments
PO1 Each lot has an adequate volume and supply of water that: (a) meets the needs of users; (b) is adequate for firefighting purposes; (c) ensures the health, safety and convenience of the community; and (d) minimises adverse impacts on the receiving environment.	AO1.1 Development is connected to a reticulated water supply system in accordance with the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional Development Manual other than where located: (a) in the Conservation zone, Rural zone or Rural residential zone; and (b) outside a reticulated water supply service area.		Conditioned.
	Development, where located outside a reticulated water supply service area and in the Conservation zone, Rural zone or Rural residential zone is provided with: (a) a bore or bores are provided in accordance with the Design Guidelines set out in the Planning Scheme Policy 4 – FNQROC Regional Development Manual; or (b) on-site water storage tank/s: (i) with a minimum capacity of 90,000L; (ii) fitted with a 50mm ball valve with a camlock fitting; and (iii) which are installed and connected prior to the occupation or use of the development.	n/a	
Wastewater disposal			

Performance outcomes	Acceptable outcomes	Complies	Comments
PO2 Each lot provides for the treatment and disposal of effluent and other waste water that: (a) meets the needs of users; (b) is adequate for firefighting purposes; (c) ensures the health, safety and convenience of the community; and (d) minimises adverse impacts on the receiving environment.	AO2.1 Development is connected to a reticulated sewerage system in accordance with the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional Development Manual other than where located: (a) in the Conservation zone, Rural zone or Rural residential zone; and (b) outside a reticulated sewerage service area.		Conditioned.
	AO2.2 An effluent disposal system is provided in accordance with ASNZ 1547 On-Site Domestic Wastewater Management (as amended) where development is located: (a) in the Conservation zone, Rural zone or Rural residential zone; and (b) outside a reticulated sewerage service area.	n/a	
Stormwater infrastructure			
PO3 Stormwater infrastructure is designed and constructed to collect and convey the design storm event to a lawful point of discharge in a manner that mitigates impacts on life and property.	AO3.1 Where located within a Priority infrastructure area or where stormwater infrastructure is available, development is connected to Council's stormwater network in accordance with the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional Development Manual.	•	Will comply.

Performance outcomes	Acceptable outcomes	Complies	Comments
	AO3.2 On-site drainage systems are constructed: (a) to convey stormwater from the premises to a lawful point of discharge; and (b) in accordance with the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional Development Manual.	•	Will comply.
Electricity supply			
PO4 Each lot is provided with an adequate supply of electricity	The premises: (a) is connected to the electricity supply network; or (b) has arranged a connection to the transmission grid; or (c) where not connected to the network, an independent energy system with sufficient capacity to service the development (at near average energy demands associated with the use) may be provided as an alternative to reticulated electricity where: (i) it is approved by the relevant regulatory authority; and (ii) it can be demonstrated that no air or noise emissions; and (iii) it can be demonstrated that no adverse impact on visual amenity will occur.		Will comply.
Telecommunications infrastr	ucture		

Performance outcomes	Acceptable outcomes	Complies	Comments
PO5 Each lot is provided with an adequate supply of telecommunication infrastructure	AO5 Development is provided with a connection to the national broadband network or telecommunication services.	•	Will be conditioned to comply.
Existing public utility servi	ices		
PO6 Development and associated works do not affect the efficient functioning of public utility mains, services or installations.	Public utility mains, services are relocated, altered or repaired in association with the works so that they continue to function and satisfy the relevant Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional Development Manual.	•	Can be conditioned to comply.
Excavation or filling			
PO7 Excavation or filling must not have an adverse impact on the:	AO7.1 Excavation or filling does not occur within 1.5 metres of any site boundary.	n/a	Not applicable.
 (a) streetscape; (b) scenic amenity; (c) environmental values; (d) slope stability; 	AO7.2 Excavation or filling at any point on a lot is to be no greater than 1.5 metres above or below natural ground level.	n/a	Not applicable.
(e) accessibility; or (f) privacy of adjoining premises.	AO7.3 Earthworks batters: (a) are no greater than 1.5 metres in height; (b) are stepped with a minimum width 2 metre berm; (c) do not exceed a maximum of two batters and two berms (not greater than 3.6 metres in total height) on any one lot; (d) have a slope no greater than 1 in 4; and (e) are retained.	n/a	Not applicable.

AO7.4 Soil used for filling or spoil from excavation is not stockpiled in locations that can be viewed from: (a) adjoining premises; or (b) a road frontage, for a period exceeding 1 month from the commencement of the filling or excavation. AO7.5 All batters and berms to be constructed in accordance with the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional	Performance outcomes	Acceptable outcomes	Complies	Comments
All batters and berms to be constructed in accordance with the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional		Soil used for filling or spoil from excavation is not stockpiled in locations that can be viewed from: (a) adjoining premises; or (b) a road frontage, for a period exceeding 1 month from the commencement of the	n/a	Not applicable.
Development Manual.		All batters and berms to be constructed in accordance with the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 –	n/a	Not applicable.
AO7.6 Retaining walls have a maximum height of 1.5 metres and are designed and constructed in accordance with the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional Development manual.		Retaining walls have a maximum height of 1.5 metres and are designed and constructed in accordance with the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional	n/a	Not applicable.
AO7.7 Excavation or filling at any point on a lot is to include measures that protect trees at the foot or top of cut or fill batters by the use of appropriate retaining methods and sensitive earth removal or placement and in accordance with the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional Development manual.		AO7.7 Excavation or filling at any point on a lot is to include measures that protect trees at the foot or top of cut or fill batters by the use of appropriate retaining methods and sensitive earth removal or placement and in accordance with the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional	n/a	Not applicable.
For assessable development Transport network	-			

Performance outcomes	Acceptable outcomes	Complies	Comments
PO8 The development has access to a transport network of adequate standard to provide for the safe and efficient movement of vehicles, pedestrians and cyclists.	AO8.1 Vehicle access, crossovers, road geometry, pavement, utilities and landscaping to the frontage/s of the site are designed and constructed in accordance with the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional Development manual.	n/a	Not applicable.
	AO8.2 Development provides footpath pavement treatments in accordance with Planning Scheme Policy 9 – Footpath Paving.	n/a	Not applicable.
Public infrastructure			
PO9 The design, construction and provision of any infrastructure that is to be dedicated to Council is cost effective over its life cycle and incorporates provisions to minimise adverse impacts.	AO9 Development is in accordance with the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional Development Manual.	•	Will be conditioned to comply.
Stormwater quality			

Performance outcomes	Acceptable outcomes	Complies	Comments
PO10	AO10.1	n/a	
Development has a non-	The following reporting is		
worsening effect on the site	prepared for all Material change		
and surrounding land and is	of use or Reconfiguring a lot		
designed to:	proposals:		
(a) optimise the	(a) a Stormwater		
interception,	Management Plan and		
retention and	Report that meets or		
removal of	exceeds the standards of		
waterborne	design and construction		
pollutants, prior to	set out in the Queensland		
the discharge to	Urban Drainage Manual		
receiving waters;	(QUDM) and the Design Guidelines and		
(b) protect the environmental values			
of waterbodies	Specifications set out in the Planning Scheme		
affected by the	Policy 4 – FNQROC		
development,	Regional Development		
including upstream,	Manual; and		
on-site and	(b) an Erosion and Sediment		
downstream	Control Plan that meets		
waterbodies;	or exceeds the Soil		
(c) achieve specified	Erosion and		
water quality	Sedimentation Control		
objectives;	Guidelines (Institute of		
(d) minimise flooding;	Engineers Australia),		
(e) maximise the use of	including:		
natural channel	(i) drainage control;		
design principles;	(ii) erosion control;		
(f) maximise community	(iii) sediment control;		
benefit; and	and		
(g) minimise risk to	(iv) water quality		
public safety.	outcomes.		

Performance outcomes	Acceptable outcomes	Complies	Comments
	For development on land greater than 2,500m² or that result in more than 5 lots or more than 5 dwellings or accommodation units, a Stormwater Quality Management Plan and Report prepared and certified by a suitably qualified design engineer (RPEQ) is prepared that demonstrates that the development: (a) meets or exceeds the standards of design and construction set out in the Urban Stormwater Quality Planning Guideline and the Queensland Water Quality Guideline; (b) is consistent with any local area stormwater water management planning; (c) accounts for development type, construction phase, local climatic conditions and design objectives; and (d) provides for stormwater quality treatment measures reflecting land use constraints, such as soil type, landscape features (including landform), nutrient hazardous areas, acid sulfate soil and rainfall erosivity.	n/a	

Performance outcomes	Acceptable outcomes	Complies	Comments
PO11 Storage areas for stormwater detention and retention: (a) protect or enhance the environmental values of receiving waters; (b) achieve specified water quality objectives; (c) where possible, provide for recreational use; (d) maximise community benefit; and (e) minimise risk to public safety. Excavation or filling	AO11 No acceptable outcome is provided.	n/a	
PO12 Traffic generated by filling or excavation does not impact on the amenity of the surrounding area.	AO12.1 Haul routes used for transportation of fill to or from the site only use major roads and avoid residential areas.	n/a	
	AO12.2 Transportation of fill to or from the site does not occur: (a) within peak traffic times; and (b) before 7am or after 6pm Monday to Friday; (c) before 7am or after 1pm Saturdays; and (d) on Sundays or Public Holidays.	n/a	

Performance outcomes	Acceptable outcomes	Complies	Comments		
PO13 Air pollutants, dust and sediment particles from excavation or filling, do not cause significant environmental harm or nuisance impacts.	AO13.1 Dust emissions do not extend beyond the boundary of the site.	n/a			
	AO13.2 No other air pollutants, including odours, are detectable at the boundary of the site.	n/a			
	AO13.3 A management plan for control of dust and air pollutants is prepared and implemented.	n/a			
PO14 Access to the premises (including driveways and paths) does not have an adverse impact on: (a) safety; (b) drainage; (c) visual amenity; and (d) privacy of adjoining premises.	ACCESS to the premises (including all works associated with the access): (a) must follow as close as possible to the existing contours; (b) be contained within the premises and not the road reserve, and (c) are designed and constructed in accordance with the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional Development manual.	n/a			
Weed and pest management					
PO15 Development prevents the spread of weeds, seeds or other pests into clean areas or away from infested areas.	AO15 No acceptable outcome is provided.	n/a			
Contaminated land					

Performance outcomes	Acceptable outcomes	Complies	Comments
PO16 Development is located and designed to ensure that users and nearby sensitive land uses are not exposed to unacceptable levels of contaminants	AO16 Development is located where: (a) soils are not contaminated by pollutants which represent a health or safety risk to users; or (b) contaminated soils are remediated prior to plan sealing, operational works permit, or issuing of building works permit.	n/a	
Fire services in developme	ents accessed by common priva	te title	
PO17 Fire hydrants are located in positions that will enable fire services to access water safely, effectively and efficiently.	Fire hydrants are located in accessways or private roads held in common private title at a maximum spacing of: (a) 120 metres for residential development; and (b) 90 metres for any other development.	n/a	
	AO17.2 Fire hydrants are located at all intersections of accessways or private roads held in common private title.	n/a	