Assessment of application against relevant Development Codes

APPLICATION DETAILS

APPLICATION		PREMISES	
FILE NO:	RAL/26/0018	**ADDRESS:**	13-15 Main Street, Mount Molloy
APPLICANT:	Rutherglen Development Co Pty Ltd	**RPD:**	Lot 27 on DA150
LODGED BY:	Freshwater Planning Pty Ltd	**AREA:**	2,792m2
DATE LODGED:	5 August 2026	**OWNER:**	Rutherglen Development Co Pty Ltd
TYPE OF APPROVAL:	Development Permit		
PROPOSED DEVELOPMENT:	Reconfiguring a Lot – Subdivision (1 into 2 lots)		
PLANNING SCHEME:	Mareeba Shire Council Planning Scheme 2016		
ZONE:	Centre zone		
LEVEL OF ASSESSMENT:	Centre zone		
SUBMISSIONS:	n/a		

Relevant Development Codes

The following Development Codes are considered to be applicable to the assessment of the application:

6.2.1 Centre zone code
8.2.3 Bushfire hazard overlay code
8.2.6 Flood hazard overlay code
9.4.2 Landscaping code
9.4.3 Parking and access code
9.4.4 Reconfiguring a lot code
9.4.5 Works, services and infrastructure code

6.2.1 Centre zone code

6.2.1.1 Application

(1) This code applies to assessing development where:
  (a) located in the Centre zone; and
  (b) it is identified in the assessment benchmarks for assessable development and requirements for accepted development column of an assessment table in Part 5 of the planning scheme.

6.2.1.2 Purpose

(1) The purpose of the Centre zone code is to provide for a mix of uses and activities.

These uses include, but are not limited to, business, retail, professional, administrative, community, entertainment, cultural and residential activities.

Centres are found at a variety of scales based on their location and surrounding activities.

(2) Mareeba Shire Council's purpose of the Centre zone code is to facilitate the orderly development of the network of centres to meet the needs of the communities throughout the shire.

(3) The purpose of the code will be achieved through the following overall outcomes:
  (a) Promotion of a mix of commercial, business, professional, accommodation and retail activities;
  (b) Industries such as service and low impact industries may be appropriate where they are for the provision of trade, service or light industries that are of a compatible scale with commercial activities and preferably do not adjoin residential areas;
  (c) Residential development is facilitated where it can integrate and enhance the fabric of the centre and is located behind or above commercial development;
  (d) Development provides a high level of amenity and is reflective of the surrounding character of the area;
  (e) Development is generally established in accessible, well-connected locations with access or future access to public transport, cycling and pedestrian networks;
  (f) Development does not compromise the viability of the hierarchy and network of activity centres, namely:
    (i) Mareeba as a major regional activity centre, which accommodates the most significant concentrations of regional-scale business, retail, entertainment, government administration, secondary and tertiary educational facilities and health and social services within the shire;
    (ii) Kuranda as a village activity centre, which accommodates services, arts and cultural facilities, sports and recreation facilities, business and employment uses to support the village and its constituent surrounding rural and rural residential communities;
    (iii) Chillagoe and Dimbulah as Rural activity centres, which provide commercial and community services to their rural catchments; and
    (iv) Biboohra, Irvinebank, Julatten, Koah, Mutchilba, Mt Molloy, Myola and Speewah as rural villages, that have limited centre activities and other non-residential activities.

6.2.1.3 Criteria for assessment

Table 6.2.1.3A—Centre zone code - For accepted development subject to requirements and assessable development

Performance outcomes	Acceptable outcomes	Complies	Comments
For accepted development subject to requirements and assessable development			
Height			
PO1 Building height takes into consideration and respects the following: (a) the height of existing buildings on adjoining premises; (b) the development potential, with respect to height, on adjoining premises; (c) the height of buildings in the vicinity of the site; (d) access to sunlight and daylight for the site and adjoining sites; (e) privacy and overlooking; and (f) site area and street frontage length.	**AO1** Development has a maximum building height of: (a) 8.5 metres; and (b) 2 storeys above ground level.	n/a	Not applicable. The application is for reconfiguring a lot only. No new buildings or structures are proposed.
Siting			
PO2 Development is sited in a manner that considers and respects: (a) the siting and use of adjoining premises; (b) access to sunlight and daylight for the	**AO2.1** Buildings are built to the road frontage/s of the site. Note—Awning structures may extend into the road reserve where provided in accordance with **PO5**.	n/a	Not applicable. The application is for reconfiguring a lot only. No new buildings or structures are proposed.

Performance outcomes	Acceptable outcomes	Complies	Comments
site and adjoining sites; (c) privacy and overlooking; (d) opportunities for casual surveillance of adjoining public spaces; (e) air circulation and access to natural breezes; (f) appearance of building bulk; and (g) relationship with pedestrian spaces.	**AO2.2** Buildings are setback and boundary treatment(s) are undertaken in accordance with **Table 6.2.1.3B**.	n/a	Not applicable. The application is for reconfiguring a lot only. No new buildings or structures are proposed.
Accommodation density			
PO3 The density of Accommodation activities: (a) contributes to housing choice and affordability; (b) respects the nature and density of surrounding land use; (c) does not cause amenity impacts beyond the reasonable expectation of the planned accommodation density for the centre; and (d) is commensurate to the scale and frontage of the site.	**AO3** Development provides a maximum density for Accommodation activities of: (a) 1 dwelling or accommodation unit per 120m^2 site area; and (b) 1 bedroom per 60m^2 site area.	✔	The application does not propose a new accommodation activity.

Performance outcomes	Acceptable outcomes	Complies	Comments
Site cover			
PO4 Buildings and structures occupy the site in a manner that: (a) makes efficient use of land; (b) is consistent with the bulk and scale of surrounding buildings; and (c) appropriately balances built and natural features.	**AO4** Site cover does not exceed 90%.	n/a	Not applicable. The application is for reconfiguring a lot only. No new buildings or structures are proposed. Existing site cover is less than 90%.
For assessable development			
Building design			
PO5 Building facades are appropriately designed to: (a) provide an active and vibrant streetscape; (b) include visual interest and architectural variation; (c) maintain and enhance the character of the surrounds; (d) provide opportunities for casual surveillance; (e) include a human scale; and	**AO5.1** Buildings address and provide pedestrian entrances to: (a) the primary pedestrian frontage where a single frontage lot or multiple frontage lot that is not a corner lot; (b) the primary and secondary frontages where a corner lot, with a pedestrian entrance provided on each frontage and/or as part of a corner truncation; and (c) any adjoining public place, with the main entrance provided on this boundary.	n/a	Not applicable. The application is for reconfiguring a lot only. No new buildings or structures are proposed.

Performance outcomes	Acceptable outcomes	Complies	Comments
(f) encourage occupation of outdoor space.	**AO5.2** Building frontages: (a) are broken into smaller, 10 metre wide components by doors, display windows, pillars and structural elements; (b) are articulated with projections and recesses; (c) include windows where the bottom of the window is located between 0.6 metres and 0.9 metres above the footpath level; and (d) have a minimum 40% of the building facade facing the street is comprised of windows that are not painted or treated to obscure transparency.	n/a	Not applicable. The application is for reconfiguring a lot only. No new buildings or structures are proposed.
	AO5.3 Buildings incorporate cantilevered awnings that are: (a) provided along the full length of the building's frontage to the street; (b) set back 0.6 metres from the face of the kerb or to match the alignment of the awning/s of the adjoining building/s; (c) a minimum of 3 metres and a maximum of 4.2 metres above the finished level of the footpath from the underside of the awning; and (d) truncated at the corner with a 2 metre single cord truncation where located on a corner site.	n/a	Not applicable. The application is for reconfiguring a lot only. No new buildings or structures are proposed.

Performance outcomes	Acceptable outcomes	Complies	Comments
PO6 Development complements and integrates with the established built character of the Centre zone, having regard to: (a) roof form and pitch; (b) eaves and awnings; (c) building materials, colours and textures; and (d) window and door size and location.	**AO6** No acceptable outcome is provided.	n/a	Not applicable. The application is for reconfiguring a lot only. No new buildings or structures are proposed.
Accommodation activities			
PO7 Accommodation activities are appropriately located in buildings in the Centre zone, having regard to: (a) the use of adjoining premises; and (b) the provision of an active and vibrant streetscape.	**AO7** Accommodation activities are located above the ground floor.	✔	The application does not propose a new accommodation activity.
Amenity			
PO8 Development must not detract from the amenity of the local area, having regard to: (a) noise; (b) hours of operation; (c) traffic; (d) advertising devices; (e) visual amenity; (f) privacy; (g) lighting; (h) odour; and (i) emissions.	**AO8** No acceptable outcome is provided.	✔	The application is for reconfiguring a lot only. No change in local area amenity is expected as a result of the development.

Performance outcomes	Acceptable outcomes	Complies	Comments
PO9 Development must take into account and seek to ameliorate any existing negative environmental impacts, having regard to: (a) noise; (b) hours of operation; (c) traffic; (d) advertising devices; (e) visual amenity; (f) privacy; (g) lighting; (h) odour; and (i) emissions.	**AO9** No acceptable outcome is provided.	✔	There are no known negative environmental impacts requiring amelioration.

Table 6.2.1.3B—Setbacks and treatments to side and rear boundaries

Design	Where adjoining land in the Low density residential zone, the Medium density residential zone or the Rural residential zone	Where including windows facing the side boundary	All other instances
Building and structure setback	2 metres	1 metre	0 metres
Boundary treatment	• Landscape strip with a minimum width of 1.5 metres; and • 1.8 metre high solid screen fence	Screening to windows where required to prevent overlooking or privacy impacts	Blank wall including low maintenance finishes and materials

8.2.3 Bushfire hazard overlay code

8.2.3.1 Application

(1) This code applies to assessing development where:
  (a) land the subject of development is located within a Bushfire hazard area and Potential impact buffer (100 metres) identified on the **Bushfire hazard overlay maps (OM-003a-o)**; and
  (b) it is identified in the assessment benchmarks for assessable development and requirements for accepted development column of an assessment table in Part 5 of the planning scheme.

Note—Natural hazards are appropriately reflected in Overlay Maps 3, 6 and 8 and are required to be mapped by State Government in response to Hazard and Safety State Interests.

8.2.3.2 Purpose

(1) The purpose of the Bushfire hazard overlay code is to minimise the threat of bushfire to people and property.

(2) The purpose of the code will be achieved through the following overall outcomes:
  (a) Development in a Bushfire hazard area is compatible with the nature of the hazard;
  (b) The number of people and properties subject to bushfire hazards are minimised through appropriate building design and location;
  (c) Development does not result in a material increase in the extent, duration or severity of bushfire hazard; and
  (d) Appropriate infrastructure is available to emergency services in the event of a bushfire.

8.2.3.3 Criteria for assessment

Table 8.2.3.3—Bushfire hazard overlay code — For accepted development subject to requirements and assessable development

Performance outcomes	Acceptable outcomes	Complies	Comments
For accepted development subject to requirements and assessable development			
Water supply for fire-fighting purposes			
PO1 Development where within a 'Bushfire hazard area' and 'Potential impact buffer (100 metres)' identified on the **Bushfire hazard overlay maps (OM-003a-o)** maintains the safety of people and property by providing an adequate, accessible and reliable water supply for fire-fighting purposes which is safely located and has sufficient flow and pressure characteristics. Note— A Bushfire hazard management plan must be prepared by suitably qualified persons in seeking to demonstrate compliance with the Performance outcome.	**Where within a 'Bushfire hazard area' and 'Potential impact buffer (100 metres)' identified on the Bushfire hazard overlay maps (OM-003a-o)** **AO1.1** Where in a reticulated water service area, the on-site water supply has flow and pressure characteristics of 10 litres a second at 200 kPa. OR	✔	The site is serviced by the Mt Molloy reticulated water network.
	AO1.2 Where access to the reticulated water network is not available, a minimum on site water storage of 5,000 litres is provided that must comprise:	n/a	Not applicable.

Performance outcomes	Acceptable outcomes	Complies	Comments
	(a) a separate tank; or (b) a reserve section in the bottom part of the main water supply tank; or (c) a dam; or (d) a swimming pool. Note—Where a water tank is provided for fire-fighting purposes it is fitted with standard rural fire brigade fittings and the tank is provided with a hardstand area for heavy vehicles.		
For assessable development			
Land use			
PO2 Development within a 'Bushfire hazard area' and 'Potential impact buffer (100 metres)' identified on the **Bushfire hazard overlay maps (OM-003a-o)** is appropriate to the bushfire hazard risk having regard to the: (a) the bushfire risk compatibility of development; (b) the vulnerability of and safety risk to persons associated with the use; and (c) consequences of bushfire in regard to impacts on essential infrastructure, buildings and structures. Note— A Bushfire hazard management plan must be prepared by suitably qualified persons in seeking to demonstrate compliance with the Performance outcome.	**AO2** All buildings, structures, infrastructure and facilities associated with the following uses are located outside any area of the site located within a 'Bushfire hazard area' and a 'Potential impact buffer (100 metres)' identified on the **Bushfire hazard overlay maps (OM-003a-o)**: (a) child care centre; or (b) community care centre; or (c) correctional facility; or (d) educational establishment; or (e) emergency services; or (f) hospital; or (g) residential care facility; or (h) retirement facility; or (i) rooming accommodation; or (j) shopping centre; or (k) tourist park; or (l) tourist attraction.	✔	The application does not propose any of the nominated uses.
Lot design			
PO3 Reconfiguring a lot within a 'Bushfire hazard area' and 'Potential impact buffer (100 metres)' identified on the **Bushfire hazard overlay maps (OM-003a-o)** minimises the potential adverse impacts of bushfire on the safety of people,	**Where within a 'Bushfire hazard area' and 'Potential impact buffer (100 metres)' identified on the Bushfire hazard overlay maps (OM-003a-o)** **AO3.1** No new lots are created. OR	✔	Both lots are already developed.

Performance outcomes	Acceptable outcomes	Complies	Comments
property and the environment through lot design that: (a) is responsive to the nature and extent of bushfire risk; and (b) allows efficient emergency access to buildings for fire-fighting appliances. Note— A Bushfire hazard management plan must be prepared by suitably qualified persons in seeking to demonstrate compliance with the Performance outcome.	**AO3.2** All lots include a building envelope that achieves a radiant heat flux level of 29kW/m^2 at the permitter of the building envelope. Note—Where a radiant heat flux of 29kW/m^2 is achieved and this relies on cleared or maintained land external to the land the subject of the development application it must be demonstrated that land external to the site will be maintained to a standard that does not exceed the level of bushfire hazard identified in a Bushfire hazard management plan.		
Firebreaks and access			
PO4 In a 'Bushfire hazard area' and 'Potential impact buffer (100 metres)' identified on the **Bushfire hazard overlay maps (OM-003a-o)**, vehicular access is designed to mitigate against bushfire hazard by: (a) ensuring adequate access for fire-fighting and other emergency vehicles; (b) ensuring adequate access for the evacuation of residents and emergency personnel in an emergency situation, including alternative safe access routes should access in one direction be blocked in the event of a fire; and (c) providing for the separation of developed areas and adjacent bushland. Note—Where it is not practicable to provide firebreaks in accordance with A04.2 Fire Maintenance Trails are provided in accordance with the following: i. located as close as possible to the boundaries of the lot and the adjoining hazardous vegetation;	**AO4.1** In a 'Bushfire hazard area' and 'Potential impact buffer (100 metres)' identified on the **Bushfire hazard overlay maps (OM-003a-o)**, roads are designed and constructed: (a) with a maximum gradient of 12.5%; (b) to not use cul-de-sacs; and (c) a constructed road width and weather standard complying with Planning Scheme Policy 4 - FNQROC Regional Development Manual.	n/a	No new roads will be constructed.
	AO4.2 In a 'Bushfire hazard area' and 'Potential impact buffer (100 metres)' identified on the **Bushfire hazard overlay maps (OM-003a-o)**, firebreaks are provided: (a) consisting of a perimeter road that separates lots from areas of bushfire hazard; (b) a minimum cleared width of 20 metre; (c) a maximum gradient of 12.5%; and (d) a constructed road width and weather standard complying with Planning Scheme Policy 4 -	✔	**Firebreak function** Main Street and Crothers Street provide separation and access along the western and southern boundaries, supporting their role as firebreaks. **Access and maintenance** Cleared areas and driveways on the adjoining northern and

Performance outcomes	Acceptable outcomes	Complies	Comments
ii. the minimum cleared width not less than 6 metres; iii. the formed width is not less than 2.5 metres; iv. the formed gradient is not greater than 15%; v. vehicular access is provided at both ends; *vi.* passing bays and turning areas are provided for fire-fighting appliances located on public land. Note— A Bushfire hazard management plan must be prepared by suitably qualified persons in seeking to demonstrate compliance with the Performance outcome.	FNQROC Regional Development Manual.		eastern allotments further support access and ongoing fire management.
Hazardous materials			
PO5 Public safety and the environment are not adversely affected by the detrimental impacts of bushfire of hazardous materials manufactured or stored in bulk. Note— A Bushfire hazard management plan must be prepared by suitably qualified persons in seeking to demonstrate compliance with the Performance outcome.	**AO5** The processing or storage of dangerous goods or hazardous materials is not undertaken in a 'Bushfire hazard area' and a 'Potential impact buffer (100 metres)' identified on the **Bushfire hazard overlay maps (OM-003a-o)**.	n/a	The application is for reconfiguring a lot only.
Landscaping			
PO6 Landscaping within a 'Bushfire hazard area' and a 'Potential impact buffer (100 metres)' identified on the **Bushfire hazard overlay maps (OM-003a-o)** does not result in a material increase in the extent, duration or severity of bushfire hazard having regard to: (a) fire ecology; (b) slope of site; and (c) height and mix of plant species. Note–Frost hollows and the associated grass kill facilitates a rapid curing of fuel and exacerbates bushfire hazard.	**AO6** No acceptable outcome is provided.	✔	No landscaping is proposed.

Performance outcomes	Acceptable outcomes	Complies	Comments
Note— A Bushfire hazard management plan must be prepared by suitably qualified persons in seeking to demonstrate compliance with the Performance outcome.			
Infrastructure			
PO7 Infrastructure services located in a 'Bushfire hazard area' and a 'Potential impact buffer (100 metres)' identified on the **Bushfire hazard overlay maps (OM-003a-o)** are protected from damage or destruction in the event of a bushfire. Note— A Bushfire hazard management plan must be prepared by suitably qualified persons in seeking to demonstrate compliance with the Performance outcome.	**AO7** The following infrastructure services are located below ground: (a) water supply; (b) sewer; (c) electricity; (d) gas; and (e) telecommunications	✔	New infrastructure will comply.
Private driveways			
PO8 All premises located in a 'Bushfire hazard area' and a 'Potential impact buffer (100 metres)' identified on the **Bushfire hazard overlay maps (OM-003a-o)** are provided with vehicular access that enables safe evacuation for occupants and easy access by fire-fighting appliances. Note— A Bushfire hazard management plan must be prepared by suitably qualified persons in seeking to demonstrate compliance with the Performance outcome.	**AO8** Private driveways: (a) do not exceed a length of 60 metres from the street frontage; (b) do not exceed a gradient of 12.5%; (c) have a minimum width of 3.5 metres; (d) have a minimum vertical clearance of 4.8 metres; (e) accommodate turning areas for fire-fighting appliances in accordance with the Queensland Fire and Emergency Services' Fire Hydrant and Vehicle Access Guidelines; and (f) serve no more than three dwellings or buildings.	n/a	Not applicable.

8.2.6 Flood hazard overlay code

8.2.6.1 Application

(1) This code applies to assessing development where:
  (a) land the subject of development is located within a Flood hazard area identified on the **Flood hazard overlay maps (OM-006a-o)**; and
  (b) it is identified in the assessment benchmarks for assessable development and requirements for accepted development column of an assessment table in Part 5 of the planning scheme.

Note—Natural hazards are appropriately reflected in Overlay Maps 3, 6 and 8 and are required to be mapped by State Government in response to Hazard and Safety State Interests.

Note—where new information, including flood studies or flood modelling supersedes the Flood hazard overlay maps (OM-006a-o) Council may have regard to this new information in the application of the Flood hazard overlay code in the interests of the precautionary principle and the safety of persons and property.

8.2.6.2 Purpose

(1) The purpose of the Flood hazard overlay code is to manage development outcomes in flood hazard areas identified on the **Flood hazard overlay maps (OM-006a-o)** so that risk to life, property, community and the environment during flood events is minimised, and to ensure that development does not increase the potential for flood damage on site or to other property.

(2) The purpose of the code will be achieved through the following overall outcomes:

  (a) Development in the 'Extreme flood hazard area':
    i. maintains and enhances the hydrological function of the land;
    ii. does not involve filling (earthworks) or changes to existing landform or drainage lines that results in a loss of the flood conveyance and flood storage capacity of the land;
    iii. is limited to:
      A. flood proofed Sport and recreation activities;
      B. Rural activities where for Animal husbandry, Cropping or Permanent plantation;
      C. flood proofed Utility installations, Substations or Major electricity infrastructure;
      D. conservation and natural area management; and
      E. replacement of existing lawful development, including Accommodation activities where habitable rooms are elevated above the defined flood level and include freeboard;

    Where there is no increase to the number of persons at risk of flood and where development reduces existing or potential risks to life and property.

  (b) Development in the 'High flood hazard area':
    i. maintains the hydrological function of the land;
    ii. does not involve filling (earthworks) or changes to the existing landform or drainage lines that results in a loss of the flood conveyance and flood storage capacity of the land;
    iii. is limited to:
      A. flood proofed Sport and recreation activities and Club uses;
      B. Non-resident workforce accommodation, Relocatable home park, Resort complex, Rooming accommodation, Short term accommodation and

Tourist park uses where these uses comprise permanent on-site management and a flood evacuation management plan ensures the health and safety of persons during a flood event;

C. a Dwelling house only where the lot existed or had a lawful reconfiguring a lot approval at the commencement of the planning scheme and the land is included in a Residential zone or the Centre zone or where for minor intensification of existing Dwelling houses;
D. Rural activities where for Animal husbandry, Cropping or Permanent plantation;
E. Industrial activities and Commercial activities where it is accepted development that flood damage is incurred as an operational cost and where flood sensitive elements of the development or use are elevated above the defined flood level, including freeboard;
F. flood proofed Utility installations, Substations or Major electricity infrastructure;
G. conservation and natural area management; and
H. replacement of existing lawful development;

where there is no increase to the number of persons at risk of flood and where development reduces existing or potential risks to life and property.

iv. protects surrounding land and land uses from increased flood hazard impacts;
v. elevates habitable rooms for all accommodation activities (including where for minor building work) above the defined flood level, including freeboard.

(c) Development in the 'Significant flood hazard area':
i. minimises risk to life and property from flood events;
ii. involves changes to the existing landform and drainage lines in this area only where detrimental impacts to the flood hazard risk of surrounding areas is avoided;
iii. is limited to:
A. Sport and recreation activities;
B. Industrial activities and Commercial activities where it is accepted development that flood damage is incurred as an operational cost and where flood sensitive elements of the development or use are elevated above the defined flood level, including freeboard;
C. Rural activities;
D. Accommodation activities, excluding Residential care facility and Retirement facility;
E. flood proofed Community activities, excluding Child care centre, Hospital and Community use where a flood emergency evacuation plan ensures the safety of people during a flood event;
F. flood proofed Utility installations, Substations or Major electricity infrastructure;
G. conservation and natural area management;
iv. locates habitable rooms for all accommodation activities above the defined flood level, including freeboard; and
v. locates the minimum floor level for all buildings other than accommodation activities, industrial activities and business activities above the defined flood level.

(d) Development in the 'Low flood hazard area':
   i. minimises risk to life and property from flood events;
   ii. locates habitable rooms for all Accommodation activities above the defined flood level, including freeboard; and
   iii. locates the minimum floor level for all buildings other than Accommodation activities above the defined flood level, including freeboard.

(e) Development in the 'Potential flood hazard area':
   i. maintains the safety of people on the development site from flood events and minimises the potential damage from flooding to property;
   ii. does not result in adverse impacts on people's safety, the environment or the capacity to use land within the floodplain;
   iii. locates habitable rooms for all Accommodation activities above a 1% Annual Exceedance Probability (AEP), including freeboard; and
   iv. locates the minimum floor level for all building work other than Accommodation activities above the 1% AEP flood level, including freeboard.

8.2.6.3 Criteria for assessment

Table 8.2.6.3A - Flood hazard overlay code - For accepted development subject to requirements and assessable development

Performance outcomes	Acceptable outcomes	Complies	Comments
For accepted development subject to requirements and assessable development			
All flood hazard areas			
PO1 Development prevents the carriage or dispersal of contaminants or pollutants into the receiving environment.	**AO1** The processing or storage of dangerous goods or hazardous materials is: (a) not undertaken in a flood hazard area identified on the **Flood hazard overlay maps (OM-006a-o)**; or (b) is located above the defined flood level plus 0.3 metre freeboard.	✔	All of Mount Molloy township is mapped as Potential Flood Hazard Area. The site is set well above the known historic or potential future 100 year flood height.
PO2 Essential community infrastructure is able to function effectively during and immediately after flood events.	**AO2** Design levels for buildings must comply with the flood immunity standards specified in **Table 8.2.6.3.B** and **Table 8.2.6.3.C** where within a flood hazard area identified on the **Flood hazard overlay maps (OM-006a-o)**.	n/a	Refer to comment for AO1.
Extreme flood hazard area			

Performance outcomes	Acceptable outcomes	Complies	Comments
PO3 Development, where involving a Material change of use within an 'Extreme flood hazard area' on the **Flood hazard overlay maps (OM006a-o)**, is appropriate to the flood hazard risk having regard to the: (a) likelihood and frequency of flooding; (b) flood risk acceptability of development; (c) vulnerability of and safety risk to persons associated with the use; (d) associated consequences of flooding in regard to impacts on proposed buildings, structures, and supporting infrastructure; and (e) associated consequences of flooding in respect to undue burden on disaster response recovery capacity and capabilities.	**AO3.1** Uses within the following activity groups are not located within an 'Extreme flood hazard area identified' on the **Flood hazard overlay maps (OM006a-o)**: (a) Accommodation activities; (b) Commercial activities; (c) Community activities except where for a Club with a maximum gross floor area of 100m^2; (d) Industrial activities; (e) Rural activities, except where for Animal husbandry, Cropping, or Permanent plantation.	n/a	Refer to comment for AO1.
	AO3.2 Sport and recreation activities are not located within an 'Extreme flood hazard area' identified on the **Flood hazard overlay maps (OM006a-o)** except where for: (a) Environment facility; (b) Park; or (c) Outdoor sport and recreation (excluding the provision of ancillary facilities or amenities conducted within a building).	n/a	Refer to comment for AO1.

Performance outcomes	Acceptable outcomes	Complies	Comments
PO4 Development is located and designed to: (a) maintain and enhance the flood conveyance capacity of the premises; (b) not increase the number of people calculated to be at risk from flooding; (c) not increase the flood impact on adjoining premises; (d) ensure the safety of all persons by ensuring that development levels are set above the defined flood level; (e) reduce property damage; and (f) provide flood immune access to buildings. Note—Buildings may be constructed from flood resistant, waterproof materials below the defined flood level where certified by a qualified structural engineer to be flood proof (including the ability to withstand damage from floodwater and debris) and where an alternative outcome to AO4.1-AO4.4 is also demonstrated. Note—In the event that a lawful building or structure is destroyed by flood or other event the building may be replaced in situ where there is no increase in: i. gross floor area; or ii. the number of dwellings or bedrooms on the premises.	**AO4.1** Buildings, including extensions to existing buildings, are: (a) not located within an 'Extreme flood hazard area' identified on the **Flood hazard overlay maps (OM006a-o)**; or (b) elevated above the defined flood level, with 0.3 metres freeboard from the defined flood level provided for habitable rooms within a dwelling.	n/a	Refer to comment for AO1.
	AO4.2 All building work must be high set and retains the flood storage and conveyance capacity of the premises. Note—Building work must be certified by a qualified structural engineer to be flood proof including the ability to withstand damage from floodwater and debris.	n/a	Refer to comment for AO1.
	AO4.3 New buildings are provided with flood free pedestrian and vehicle evacuation access between the building and a flood safe accessible road. Note—A flood safe accessible road includes a road where identified as outside a flood hazard area or within a 'Low flood hazard area', 'Potential flood hazard area' or 'Significant flood hazard area' on the **Flood hazard overlay maps (OM006a-o)**.	n/a	Refer to comment for AO1.
	AO4.4 Development does not increase the number of lots in the 'Extreme flood hazard area' identified on the **Flood hazard overlay maps (OM006a-o)** except where for the purposes of public open space.	n/a	Refer to comment for AO1.

Performance outcomes	Acceptable outcomes	Complies	Comments
PO5 Development involving earthworks in a Flood hazard area below the defined flood level must protect life and property on premises and off premises through maintaining: (a) flood storage capacity of land; (b) flood conveyance function of land; (c) flood and drainage channels; (d) overland flow paths; and (e) flood warning times.	**AO5** Filling above ground level is not undertaken in the 'Extreme flood hazard area' identified on the **Flood hazard overlay maps (OM006a-o)**.	n/a	Refer to comment for AO1.
High flood hazard area			
PO6 Development, where for a Material change of use within a 'High flood hazard area' identified on the **Flood hazard overlay maps (OM-006a-o)**, is appropriate to the flood hazard risk having regard to the: (a) likelihood and frequency of flooding; (b) flood risk acceptability of development; (c) vulnerability of and safety risk to persons associated with the use; (d) associated consequences of flooding in regard to impacts on proposed buildings, structures and supporting infrastructure; and	**AO6.1** Uses within the following activity groups are not located within a 'High flood hazard area' identified on the **Flood hazard overlay maps (OM006a-o)**: (a) Accommodation activities, except where for Dwelling house and only where the lot existed or had a lawful reconfiguring a lot approval at the commencement of the planning scheme and the land is included in a Residential zone or the Centre zone; (b) Community activities except where for a Club with a maximum gross floor area of 100m^2; (c) Rural activities, except where for Animal husbandry, Cropping or Permanent plantation.	n/a	Refer to comment for AO1.

Performance outcomes	Acceptable outcomes	Complies	Comments
(e) associated consequences of flooding in respect to undue burden on disaster response recovery capacity and capabilities.	**AO6.2** Sport and recreation activities are not located within a 'High flood hazard area' identified on the **Flood hazard overlay maps (OM006a-o)** except where for: (a) Environment facility; (b) Park; or (c) Outdoor sport and recreation (excluding the provision of ancillary facilities or amenities conducted within a building).	n/a	Refer to comment for AO1.
PO7 Development is located and designed to: (a) maintain hydrological function of the premises; (b) not increase the number of people calculated to be at risk from flooding; (c) minimises the flood impact on adjoining premises; (d) ensure the safety of all persons by ensuring that an appropriate	**AO7.1** Buildings, including extensions to existing buildings are: (a) not located within the 'High flood hazard area' identified on the **Flood hazard overlay maps (OM006a-o)**; or (b) elevated above the defined flood level, with 0.3 metres freeboard from the defined flood level provided for habitable rooms within a dwelling. OR	n/a	Refer to comment for AO1.

Performance outcomes	Acceptable outcomes	Complies	Comments
proportion of buildings are set above the defined flood level; (e) reduce the carriage of debris in flood waters; (f) reduce property damage; and (g) provide flood immune access to buildings. Note—Buildings may be constructed from flood resistant, waterproof materials below the defined flood level where certified by a qualified structural engineer to be flood proof (including the ability to withstand damage from floodwater and debris) and where an alternative outcome to AO8.1-AO8.9 is also demonstrated.	**AO7.2** Buildings used for Commercial activities or Industrial activities include a minimum floor level of 0.3 metres above the defined flood where for the following components of the use: (a) administrative areas; or (b) services, plant and equipment associated with the building. Note—AO8.2 accepts that the cost of flood impact is an operational cost of the Commercial activity or Industrial activity. Note—Building work must be certified by a qualified structural engineer to be flood proof including the ability to withstand damage from floodwater and debris.	n/a	Refer to comment for AO1.
	AO7.3 All building work below the defined flood level must be high set (comprising pier and beam construction) and retains the flood storage and conveyance capacity of the premises.	n/a	Refer to comment for AO1.
	AO7.4 New buildings are provided with flood free pedestrian and vehicle evacuation access between the building and a flood safe accessible road. Note—A flood safe accessible road includes a road where identified as outside a flood hazard area or within a 'Low flood hazard area', 'Potential flood hazard area' or 'Significant flood hazard area' on the **Flood hazard overlay maps (OM006a-o)**.	n/a	Refer to comment for AO1.
	AO7.5 New temporary, relocatable or impermanent buildings and structures are to be anchored with the ability to withstand transportation by floodwater. Note—Building work must be certified by a qualified structural engineer.	n/a	Refer to comment for AO1.

Performance outcomes	Acceptable outcomes	Complies	Comments
	AO7.6 Dwellings do not exceed four bedrooms.	n/a	Refer to comment for AO1.
	AO7.7 Building work on an existing dwelling does not comprise additional bedrooms.	n/a	Refer to comment for AO1.
	AO7.8 Building work on an existing dwelling is limited to a maximum increase of 20 percent of the lawfully approved gross floor area of the existing dwelling.	n/a	Refer to comment for AO1.
	AO7.9 Development does not increase the number of lots in the 'High flood hazard area; as identified on the **Flood hazard overlay maps (OM006a-o)** except where for the purposes of public open space.	n/a	Refer to comment for AO1.
PO8 Development involving earthworks in a Flood hazard area below the defined flood level must protect life and property on premises and off premises through maintaining: (a) flood storage capacity of land; (b) flood conveyance function of land; (c) flood and drainage channels; (d) overland flow paths; and (e) flood warning times.	**AO8** Filling above ground level is not undertaken in the 'High flood hazard area' identified on the **Flood hazard overlay maps (OM006a-o)**.	n/a	Refer to comment for AO1.
Significant flood hazard area			

Performance outcomes	Acceptable outcomes	Complies	Comments
PO9 Development, involving a Material change of use, within a 'Significant flood hazard area' on the **Flood hazard overlay maps (OM006a-o)** is appropriate to the flood hazard risk having regard to the: (a) likelihood and frequency of flooding; (b) flood risk acceptability of development; (c) vulnerability of and safety risk to persons associated with the use; (d) associated consequences of flooding in regard to impacts on proposed buildings, structures and supporting infrastructure; and (e) associated consequences of flooding in respect to undue burden on disaster response recovery capacity and capabilities.	**AO9** The following uses are not located within a 'Significant flood hazard area' identified on the **Flood hazard overlay maps (OM006a-o)**: (a) Residential care facility; (b) Retirement facility; (c) Child care centre; (d) Hospital; or (e) Community use.	n/a	Refer to comment for AO1.
Significant flood hazard area, Low flood hazard area or Potential flood hazard area			

Performance outcomes	Acceptable outcomes	Complies	Comments
PO10 Development, where involving a Material change of use or Building work, is located and designed to: (a) maintain hydrological function of the premises; (b) not increase the number of people calculated to be at risk from flooding; (c) minimises the flood impact on adjoining premises; (d) ensure the safety of all persons by ensuring that a proportion of buildings are set above the defined flood level; (e) reduce the carriage of debris in flood waters; (f) reduce property damage; and (g) provide flood immune access to buildings. Note—Where the development is located in a 'Potential flood hazard area' identified on the **Flood hazard overlay maps (OM006a-o)** and there is no defined flood level a hydraulic (flood hazard assessment) report prepared by a RPEQ is required in substantiation of an alternative outcome is required or the defined flood level from the adjacent representative hazard zone is used.	**AO10.1** Buildings, including extensions to existing buildings are: (a) elevated above the defined flood level; and (b) the defined flood event does not exceed a depth of 600mm; and (c) elevated above the defined flood level plus 0.3 metres freeboard where for habitable rooms within a dwelling. OR	n/a	Refer to comment for AO1.
	AO10.2 Buildings used for Commercial activities or Industrial activities include a minimum floor level of 0.3 metres above the defined flood where for the following components of the use: (a) administrative areas; or (b) services, plant and equipment associated with the building. Note—AO10.2 accepts that the cost of flood impact is an operational cost of the Commercial activity or Industrial activity. Note—Building work must be certified by a qualified structural engineer to be flood proof including the ability to withstand damage from floodwater and debris.	n/a	Refer to comment for AO1.
	AO10.3 All building work below the defined flood level must be high set (comprising pier and beam construction) and retains the flood storage and conveyance capacity of the premises. Note—Building work must be certified by a qualified structural engineer to be flood proof including the ability to withstand damage from floodwater and debris.	n/a	Refer to comment for AO1.

Performance outcomes	Acceptable outcomes	Complies	Comments
PO11 Development involving earthworks in a Flood hazard area below the defined flood level must protect life and property on premises and off premises through maintaining: (a) flood storage capacity of land; (b) flood conveyance function of land; (c) flood and drainage channels; (d) overland flow paths; and (e) flood warning times.	**AO11** Development does not involve in excess of $50m^3$ of fill above ground level per $1,000m^2$ of site area.	n/a	Refer to comment for AO1.
For assessable development			
Where for Material change of use or Reconfiguring a lot that involves new gross floor area or increases the number of persons living, working or residing in the Extreme flood hazard area, High flood hazard area or Significant flood hazard area other than a Dwelling house.			

Performance outcomes	Acceptable outcomes	Complies	Comments
PO12 Flood risk management minimises the impact on property and appropriately protects the health and safety of persons at risk of Extreme, high or significant flood hazard, and: (a) indicates the position and path of all safe evacuation routes off the site; and (b) if the site contains or is within 100 metres of a flood hazard area, hazard warning signage and depth indicators are provided at key hazard points, such as at floodway crossings. Note—A Material change of use or Reconfiguring a lot that involves new gross floor area or increases the number of persons living, working or residing in the 'Extreme flood hazard area' identified on the **Flood hazard overlay map (OM006a-o)** is supported by a Flood Emergency Evacuation Plan prepared by suitably qualified persons having regard to Floodplain Management in Australia: Best Practice Principles and Guidelines (2000), prepared by Standing Committee on Agriculture and Resource Management (SCARM), CSIRO.	**AO12** No acceptable outcome is provided.	n/a	Refer to comment for AO1.

Performance outcomes	Acceptable outcomes	Complies	Comments
Significant flood hazard area, Low flood hazard area or Potential flood hazard area			
PO13 Development, where involving Reconfiguring a lot, is located and designed to: (a) maintain hydrological function of the premises; (b) not increase the number of people calculated to be at risk from flooding; (c) minimises the flood impact on adjoining premises; (d) ensure the safety of all persons by ensuring that a proportion of buildings are set above the defined flood level; (e) reduce the carriage of debris in flood waters; (f) reduce property damage; and (g) provide flood immune access to buildings. Note—Where the development is located in a 'Potential flood hazard area' identified on the **Flood hazard overlay maps (OM006a-o)** and there is no defined flood level a hydraulic (flood hazard assessment) report prepared by a RPEQ is required in substantiation of an alternative outcome is required or the defined flood level from the adjacent representative hazard zone is used.	**AO13** No acceptable outcome is provided.	n/a	Refer to comment for AO1.

Table 8.2.6.3B Flood immunity levels

Development Category	Minimum design floor or pavement levels (mAHD)
Category A	1% AEP + 0.5 metres
Category B	1% AEP + 0.3 metres
Category C	1% AEP

Category D	1% AEP
Category E	2% AEP

Note—Refer Table 8.2.6.3D for building classification by Category.

Table 8.2.6.3C Community infrastructure flood immunity levels

Development Type	Minimum design floor or pavement levels (mAHD)
Emergency services, where for:	
• Emergency Shelters	0.1% AEP
• Police facilities	0.5% AEP
• Other Emergency services	0.1% AEP + 0.5 metres
Hospital	0.1% AEP+ 0.5 metres
Community use (where for the storage of valuable records or items of historic or cultural significance including libraries and museums)	0.5% AEP
Special industry (where for power station)	0.5% AEP
Substations	0.5% AEP
Utility installation (where for a sewage treatment plant)	Defined flood level
Utility installation (where for a water treatment plant)	0.5% AEP
Utility installation (other)	Alternative outcome required.
Air services	Alternative outcome required.

Table 8.2.6.3D Development category

Building Code of Australia Building classification(1)	Development types and design levels, assigned design floor or pavement levels	Category – refer to Table 8.2.6.3B for flood planning levels
Class 1–4	Habitable room	Category A
	Non-habitable room including patio and courtyard	Category B
	Non-habitable part of a Class 2 or Class 3 building excluding the essential services(2) control room	Category B
	Parking located in the building undercroft of a multiple dwelling	Category C
	Carport, unroofed car park; vehicular manoeuvring area	Category D
	Essential electrical services(2) of a Class 2 or Class 3 building only	Category A
	Basement parking entry	Category C + 0.3 metres
Class 5, Class 6, or Class 8	Building floor level	Category C
	Garage or car park located in the building undercroft	Category C

Building Code of Australia Building classification[1]	Development types and design levels, assigned design floor or pavement levels	Category – refer to Table 8.2.6.3B for flood planning levels
	Carport or unroofed car park	Category D
	Vehicular access and manoeuvring areas	Category D
	Basement parking entry	Category C
	Essential electrical services[2]	Class 8 – Category Class 5 & 6 – Category A
Class 7a	Refer to the relevant building class specified in this table	
Class 7b	Building floor level	Category C
	Vehicular access and manoeuvring area	Category D
	Essential electrical services[2]	Category C
Class 9	Building floor level	Category A
	Building floor level for habitable rooms in Class 9a or 9c where for a Residential care facility	0.2% AEP flood
	Building floor level for habitable rooms in Class 9b where involving children, such as a child care centre	0.2% AEP flood
	Garage or car park located in the building undercroft	Category C
	Carport or unroofed car park	Category D
	Vehicular access and manoeuvring areas	Category D
	Essential electrical services[2]	Category A
Class 10a	Car parking facility	Refer to the relevant building class specified in this table
	Shed or the like	Category D
Class 10b	Swimming pool	Category E
	Associated mechanical and electrical pool equipment	Category C
	Other structures	Flood planning levels do not apply

[1] Refer to the Building Code of Australia for definitions of building classifications.

[2] Essential electrical services include any area or room used for fire control panel, telephone PABX, sensitive substation equipment including transformers, low voltage switch gear, high voltage switch gear, battery chargers, protection control and communication equipment, low voltage cables, high voltage cables, and lift or pump controls.

9.4.2 Landscaping code

9.4.2.1 Application

This code applies where it is identified in the assessment benchmarks for assessable development and requirements for accepted development column of an assessment table in Part 5 of the planning scheme.

9.4.2.2 Purpose

(1) The purpose of the Landscaping code is to ensure all development is landscaped to a standard that:
- (a) complements the scale and appearance of the development;
- (b) protects and enhances the amenity and environmental values of the site;
- (c) complements and enhances the streetscape and local landscape character; and
- (d) ensures effective buffering of incompatible land uses to protect local amenity.

(2) The purpose of the code will be achieved through the following overall outcomes:
- (a) Landscaping is a functional part of development design and is commensurate with the intended use;
- (b) Landscaping accommodates the retention of existing significant on site vegetation where appropriate and practical;
- (c) Landscaping treatments complement the scale, appearance and function of the development;
- (d) Landscaping contributes to an attractive streetscape;
- (e) Landscaping enhances the amenity and character of the local area;
- (f) Landscaping enhances natural environmental values of the site and the locality;
- (g) Landscaping provides effective screening both on site, if required, and between incompatible land uses;
- (h) Landscaping provides shade in appropriate circumstances;
- (i) Landscape design enhances personal safety and reduces the potential for crime and vandalism; and
- (j) Intensive land uses incorporate vegetated buffers to provide effective screening of buildings, structures and machinery associated with the use.

9.4.2.3 Criteria for assessment

Table 9.4.2.3A—Landscaping code - For accepted development subject to requirements and assessable development

Performance outcomes	Acceptable outcomes	Complies	Comments
For accepted development subject to requirements and assessable development			
PO1 Development, other than in the Rural zone, includes landscaping that: (a) contributes to the landscape character of the Shire; (b) compliments the character of the immediate surrounds; (c) provides an appropriate balance between built and natural elements; and (d) provides a source of visual interest.	**AO1** Development, other than in the Rural zone, provides: (a) a minimum of 10% of the site as landscaping; (b) planting in accordance with Planning Scheme Policy 6 - Landscaping and preferred plant species; (c) for the integration of retained significant vegetation into landscaping areas; (d) on-street landscaping works in accordance with the Design Guidelines set out in Section D9 Landscaping, of the Planning Scheme Policy 4 - FNQROC Regional Development Manual. Note—Where development exceeds a site cover of 90%, areas of landscaping may be provided above ground level to achieve a total supply of landscaping equivalent to 10% of the site area.	n/a	Not applicable at the reconfiguring a lot (subdivision) stage.

Performance outcomes	Acceptable outcomes	Complies	Comments
PO2 Development, other than in the Rural zone, includes landscaping along site frontages that: (a) creates an attractive streetscape; (b) compliments the character of the immediate surrounds; (c) assists to break up and soften elements of built form; (d) screen areas of limited visual interest or servicing; (e) provide shade for pedestrians; and (f) includes a range and variety of planting.	**AO2** Development, other than in the Rural zone, includes a landscape strip along any site frontage: (a) with a minimum width of 2 metres where adjoining a car parking area; (b) with a minimum width of 1.5 metres in all other locations; and (c) in accordance with Planning Scheme Policy 6 - Landscaping and preferred plant species. Note—Where development is setback from a frontage less than 1.5 metres, the setback area is provided as a landscape strip	n/a	Refer to comment for AO1.
PO3 Development includes landscaping and fencing along side and rear boundaries that: (a) screens and buffer land uses; (b) assists to break up and soften elements of built form; (c) screens areas of limited visual interest; (d) preserves the amenity of sensitive land uses; and (e) includes a range and variety of planting.	**AO3.1** Development provides landscape treatments along side and rear boundaries in accordance with **Table 9.4.2.3B**.	n/a	Refer to comment for AO1.
	AO3.2 Shrubs and trees provided in landscape strips along side and rear boundaries: (a) are planted at a maximum spacing of 1 metre; (b) will grow to a height of at least 2 metres; (c) will grow to form a screen of no less than 2 metres in height; and (d) are mulched to a minimum depth of 0.1 metres with organic mulch.	n/a	Refer to comment for AO1.

Performance outcomes	Acceptable outcomes	Complies	Comments
	AO3.3 Any landscape strip provided along a side or rear boundary is designed in accordance with Planning Scheme Policy 6 - Landscaping and preferred plant species.	n/a	Refer to comment for AO1.
PO4 Car parking areas are improved with a variety of landscaping that: (a) provides visual interest; (b) provides a source of shade for pedestrians; (c) assists to break up and soften elements; and (d) improves legibility.	**AO4.1** Landscaping is provided in car parking areas which provides: (a) a minimum of 1 shade tree for every 4 parking spaces, or part thereof, where the car parking area includes 12 or more spaces; (b) a minimum of 1 shade tree for every 6 parking spaces, or part thereof, otherwise; and (c) where involving a car parking area in excess of 500m^2: (i) shade structures are provided for 50% of parking spaces; and (ii) a minimum of 10% of the parking area as landscaping. Note—Where a shade structure is provided over part of a car parking area, shade tree planting is not required in this area of the car parking area.	n/a	Refer to comment for AO1.
	AO4.2 Landscaping in car parking areas is designed in accordance with Planning Scheme Policy 6 - Landscaping and preferred plant species.	n/a	Refer to comment for AO1.
PO5 Landscaping areas include a range and variety of planting that:	**AO5.1** Plant species are selected from the Plant Schedule in Planning Scheme Policy 6 - Landscaping and preferred plant species.	n/a	Refer to comment for AO1.

Performance outcomes	Acceptable outcomes	Complies	Comments
(a) is suitable for the intended purpose and local conditions; (b) contributes to the natural character of the Shire; (c) includes native species; (d) includes locally endemic species, where practical; and (e) does not include invasive plants or weeds.	**AO5.2** A minimum of 25% of (new and existing) plants is provided as larger, advanced stock with a minimum plant height of 0.7 metres and mulched to a minimum depth of 0.1 metres with organic mulch.	n/a	Refer to comment for AO1.
PO6 Landscaping does not impact on the ongoing provision of infrastructure and services to the Shire.	**AO6.1** Tree planting is a minimum of (a) 2 metres from any underground water, sewer, gas, electricity or telecommunications infrastructure; and (b) 4 metres from any inspection chamber.	n/a	Refer to comment for AO1.
	AO6.2 Vegetation below or within 4 metres of overhead electricity lines and power poles has a maximum height of 3.5 metres at maturity.	n/a	Refer to comment for AO1.
	AO6.3 Vegetation adjoining an electricity substation boundary, at maturity, will have: (a) a height of less than 4 metres; and (b) no foliage within 3 metres of the substation boundary, unless the substation has a solid wall along any boundary.	n/a	Refer to comment for AO1.
For assessable development			

Performance outcomes	Acceptable outcomes	Complies	Comments
PO7 Landscaping areas are designed to: (a) be easily maintained throughout the ongoing use of the site; (b) allow sufficient area and access to sunlight and water for plant growth; (c) not cause a nuisance to occupants of the site or members of the public; and (d) maintain or enhance the safety of pedestrians through the use of Crime Prevention Through Environmental Design principles.	**AO7** No acceptable outcome is provided.	n/a	Refer to comment for AO1.

Table 9.4.2.3B—Side and rear boundary landscape treatments

Location or use	Landscape Strip Minimum Width	Screen Fencing Minimum Height	Extent of treatment
Where car parking, servicing or manoeuvring areas adjoin a side or rear boundary	1 metre	Not applicable	To the extent these areas adjoin the boundary
Where involving a use other than a dwelling house on a site with a common boundary with land in the Low density residential zone, the Medium density residential zone or the Rural residential zone:	1.5 metres	1.8 metres	Along the common boundary.
Development for an industrial activity which has a common boundary with land not within the Industry zone	2 metres	1.8 metres	Along the common boundary
Development involving (a) Tourist park not in the Rural zone (b) Sales office (c) Multiple dwelling (d) Residential care facility; or (e) Dual occupancy	Not applicable	1.8 metres	Along all side and rear boundaries and between dwellings for a Dual occupancy.
Development involving (a) Tourist park in the Rural zone (b) Service station (c) Car wash; or (d) Utility installation	2 metres	Not applicable	Along all side and rear boundaries
For: (a) waste storage; (b) equipment; (c) servicing areas; and (d) private open space and site facilities associated with Caretaker's accommodation.	Not applicable	1.8 metres	To prevent visibility

Note—Where more than one landscape treatment is applicable to a development in the above table, the development is to provide a landscape treatment that satisfies all applicable minimum specifications.

9.4.3 Parking and access code

9.4.3.1 Application

This code applies to assessing development where it is identified in the assessment benchmarks for assessable development and requirements for accepted development column of an assessment table in Part 5 of the planning scheme.

9.4.3.2 Purpose

(1) The purpose of the Parking and access code is to ensure:
- (a) parking areas are appropriately designed, constructed and maintained;
- (b) the efficient functioning of the development and the local road network; and
- (c) all development provides sufficient parking, loading/service and manoeuvring areas to meet the demand generated by the use.

(2) The purpose of the code will be achieved through the following overall outcomes:
- (a) Land uses have a sufficient number of parking and bicycle spaces designed in a manner to meet the requirements of the user;
- (b) Parking spaces and associated manoeuvring areas are safe, functional and provide equitable access;
- (c) Suitable access for all types of vehicles likely to utilise a parking area is provided in a way that does not compromise the safety and efficiency of the surrounding road network;
- (d) Premises are adequately serviced to meet the reasonable requirements of the development; and
- (e) End of trip facilities are provided by new major developments to facilitate alternative travel modes.

9.4.3.3 Criteria for assessment

Table 9.4.3.3A—Parking and access code – For accepted development subject to requirements and assessable development

Performance outcomes	Acceptable outcomes	Complies	Comments
For accepted development subject to requirements and assessable development			
Car parking spaces			

Performance outcomes	Acceptable outcomes	Complies	Comments
PO1 Development provides sufficient car parking to accommodate the demand likely to be generated by the use, having regard to the: (a) nature of the use; (b) location of the site; (c) proximity of the use to public transport services; (d) availability of active transport infrastructure; and (e) accessibility of the use to all members of the community.	**AO1** The number of car parking spaces provided for the use is in accordance with **Table 9.4.3.3B**. Note—Car parking spaces provided for persons with a disability are to be considered in determining compliance with AO1.	n/a	Not applicable at the reconfiguring a lot (subdivision) stage.
Vehicle crossovers			
PO2 Vehicle crossovers are provided to:: (a) ensure safe and efficient access between the road and premises; (b) minimize interference with the function and operation of roads; and (c) minimise pedestrian to vehicle conflict.	**AO2.1** Vehicular access to/from Council roads is designed and constructed in accordance with the Standard drawings in Planning Scheme Policy 4 - FNQROC Regional Development Manual.	✔	The development will be conditioned to comply.
	AO2.2 Development on a site with two or more road frontages provides vehicular access from: (a) the primary frontage where involving Community activities or Sport and recreation activities, unless the primary road frontage is a State-controlled road; or (b) from the lowest order road in all other instances.	✔	Access will be obtained via Crothers Street.

Performance outcomes	Acceptable outcomes	Complies	Comments
	AO2.3 Vehicular access for particular uses is provided in accordance with **Table 9.4.3.3E**.	n/a	Not applicable.
PO3 Access, manoeuvring and car parking areas include appropriate pavement treatments having regard to: (a) the intensity of anticipated vehicle movements; (b) the nature of the use that they service; and (c) the character of the surrounding locality.	**AO3** Access, manoeuvring and car parking areas include pavements that are constructed in accordance with **Table 9.4.3.3C**.	n/a	Not applicable.
For assessable development			
Parking area location and design			
PO4 Car parking areas are located and designed to: (a) ensure safety and efficiency in operation; and (b) be consistent with the character of the surrounding locality.	**AO4.1** Car parking spaces, access and circulation areas have dimensions in accordance with AS/NZS 2890.1 Off-street car parking.	n/a	Refer to comment for AO1.
	AO4.2 Disabled access and car parking spaces are located and designed in accordance with AS/NZS 2890.6 Parking facilities - Off-street parking for people with disabilities.	n/a	Refer to comment for AO1.
	AO4.3 The car parking area includes designated pedestrian routes that provide connections to building entrances.	n/a	Refer to comment for AO1.

Performance outcomes	Acceptable outcomes	Complies	Comments
	AO4.4 Parking and any set down areas are: (a) wholly contained within the site; (b) visible from the street where involving Commercial activities, Community activities, Industrial activities or a use in the Recreation and open space zone; (c) are set back behind the main building line where involving a Dual occupancy, Multiple dwelling, Residential care facility or Retirement facility; and (d) provided at the side or rear of a building in all other instances.	n/a	Refer to comment for AO1.
Site access and manoeuvring			
PO5 Access to, and manoeuvring within, the site is designed and located to: (a) ensure the safety and efficiency of the external road network; (b) ensure the safety of pedestrians; (c) provide a functional and convenient layout; and (d) accommodate all vehicles intended to use the site.	**AO5.1** Access and manoeuvrability is in accordance with : (a) AS28901 – Car Parking Facilities (Off Street Parking); and (b) AS2890.2 – Parking Facilities (Off-street Parking) Commercial Vehicle Facilities. Note—Proposal plans should include turning circles designed in accordance with AP34/95 (Austroads 1995) Design Vehicles and Turning Path Templates.	n/a	Refer to comment for AO1.

Performance outcomes	Acceptable outcomes	Complies	Comments
	AO5.2 Vehicular access has a minimum sight distance in accordance with Part 5 of AUSTROADS.	n/a	Refer to comment for AO1.
	AO5.3 Vehicular access is located and designed so that all vehicles enter and exit the site in a forward gear.	n/a	Refer to comment for AO1.
	AO5.4 Pedestrian and cyclist access to the site: (a) is clearly defined; (b) easily identifiable; and (c) provides a connection between the site frontage and the entrance to buildings and end of trip facilities (where provided).	n/a	Refer to comment for AO1.
PO6 Development that involves an internal road network ensures that it's design: (a) ensure safety and efficiency in operation; (b) does not impact on the amenity of residential	**AO6.1** Internal roads for a Tourist park have a minimum width of: (a) 4 metres if one way; or (b) 6 metres if two way.	n/a	Refer to comment for AO1.

Performance outcomes	Acceptable outcomes	Complies	Comments
uses on the site and on adjoining sites, having regard to matters of: (i) hours of operation; (ii) noise (iii) light; and (iv) odour; (c) accommodates the nature and volume of vehicle movements anticipated to be generated by the use; (d) allows for convenient access to key on-site features by pedestrians, cyclists and motor vehicles; and (e) in the Rural zone, avoids environmental degradation.	**AO6.2** For a Tourist park, internal road design avoids the use of cul-de-sacs in favour of circulating roads, where unavoidable, cul-de-sacs provide a full turning circle for vehicles towing caravans having: (a) a minimum approach and departure curve radius of 12 metres; and (b) a minimum turning circle radius of 8 metres.	n/a	Refer to comment for AO1.
	AO6.3 Internal roads are imperviously sealed and drained, apart from those for an Energy and infrastructure activity or Rural activity.	n/a	Refer to comment for AO1.
	AO6.4 Speed control devices are installed along all internal roads, apart from those for an Energy and infrastructure activity or Rural activity, in accordance with Complete Streets.	n/a	Refer to comment for AO1.
	AO6.5 Internal roads, apart from those for an Energy and infrastructure activity or Rural activity, are illuminated in accordance with AS 4282 (as amended) - Control of Obtrusive effects of outdoor lighting.	n/a	Refer to comment for AO1.

Performance outcomes	Acceptable outcomes	Complies	Comments
	AO6.6 Where involving an accommodation activity, internal roads facilitate unobstructed access to every dwelling, accommodation unit, accommodation site and building by emergency services vehicles.	n/a	Refer to comment for AO1.
	AO6.7 For an Energy and infrastructure activity or Rural activity, internal road gradients: (a) are no steeper than 1:5; or (b) are steeper than 1:5 and are sealed.	n/a	Refer to comment for AO1.
Servicing			
PO7 Development provides access, maneuvering and servicing areas on site that: (a) accommodate a service vehicle commensurate with the likely demand generated by the use; (b) do not impact on the safety or efficiency of internal car parking or maneuvering areas; (c) do not adversely impact on the safety or efficiency of the road network; (d) provide for all servicing functions associated with the use; and (e) are located and designed to minimise their impacts on	**AO7.1** All unloading, loading, service and waste disposal areas are located: (a) on the site; (b) to the side or rear of the building, behind the main building line; (c) not adjacent to a site boundary where the adjoining property is used for a sensitive use.	n/a	Refer to comment for AO1.
	AO7.2 Unloading, loading, service and waste disposal areas allow service vehicles to enter and exit the site in a forward gear.	n/a	Refer to comment for AO1.

Performance outcomes	Acceptable outcomes	Complies	Comments
adjoining sensitive land uses and streetscape quality.	**AO7.3** Development provides a servicing area, site access and maneuvering areas to accommodate the applicable minimum servicing vehicle specified in **Table 9.4.3.3B**.	n/a	Refer to comment for AO1.
Maintenance			
PO8 Parking areas are used and maintained for their intended purpose.	**AO8.1** Parking areas are kept and used exclusively for parking and are maintained in a suitable condition for parking and circulation of vehicles.	n/a	Refer to comment for AO1.
	AO8.2 All parking areas will be compacted, sealed, drained, line marked and maintained until such time as the development ceases.	n/a	Refer to comment for AO1.
End of trip facilities			
PO9 Development within the Centre zone; Industry zone or Emerging community zone provides facilities for active transport users that: (a) meet the anticipated demand generated from the use; (b) comprise secure and convenient bicycle parking and storage; and (c) provide end of trip facilities for all active transport users.	**AO9.1** The number of bicycle parking spaces provided for the use is in accordance with **Table 9.4.3.3D**.	n/a	Refer to comment for AO1.
	AO9.2 End of trip facilities are provided in accordance with **Table 9.4.3.3D**.	n/a	Refer to comment for AO1.
If for Educational establishment or Child care centre where involving more than 100 vehicle movements per day or Renewable energy facility, Sport and recreation activities or Tourist park			

Performance outcomes	Acceptable outcomes	Complies	Comments
PO10 The level of traffic generated by the development on the surrounding local road network must not result in unacceptable impacts on adjacent land and local road users.	**AO10** A traffic impact report is prepared by a suitably qualified person that identifies: (a) the expected traffic movements to be generated by the facility; (b) any associated impacts on the road network; and (c) any works that will be required to address the identified impacts.	n/a	Refer to comment for AO1.
If for Educational establishment or Child care centre where involving more than 100 vehicle movements per day or Renewable energy facility, Sport and recreation activities or Tourist park			
PO11 The level of traffic generated by the development on the surrounding local road network must not result in unacceptable impacts on adjacent land and local road users.	**AO11** A traffic impact report is prepared by a suitably qualified person that identifies: (d) the expected traffic movements to be generated by the facility; (e) any associated impacts on the road network; and (f) any works that will be required to address the identified impacts.	n/a	Refer to comment for AO1.

Table 9.4.3.3B—Vehicle Parking and Service Vehicle Space Requirements

Definition	Minimum number of Car parking spaces	Minimum Service Vehicle Space Provision
Adult store	Inside the Centre zone: One space per 50m^2 or part thereof of GFA up to 400m^2 GFA, and one space per 20m^2 or part thereof of GFA above 400m^2. Outside the Centre zone: One space per 25m^2 or part thereof of GFA up to 400m^2 GFA, and one space per 10m^2 or part thereof of GFA above 400m^2.	One SRV space.
Agricultural supplies store	Inside the Centre zone: One space per 50m^2 or part thereof of GFA up to 400m^2 GFA, and one space per 15m^2 or part thereof of GFA above 400m^2. Outside the Centre zone: One space per 30m^2 or part thereof of GFA up to 400m^2 GFA, and one space per 10m^2 or part thereof of GFA above 400m^2. Queuing for 3 vehicles should be supplied where a GFA is greater than 600m^2.	One HRV space.
Air services	If accepted development subject to requirements development: One space per 90m^2 or part thereof of net lettable area; or If Assessable development: As determined by Council.	If accepted development subject to requirements: One space per 200m^2 or part thereof of net lettable area. If assessable development: As determined by Council.

Definition	Minimum number of Car parking spaces	Minimum Service Vehicle Space Provision
Animal husbandry	If accepted development subject to requirements : One space. If assessable development: As determined by Council.	If accepted development subject to requirements: Nil. If assessable development: As determined by Council.
Animal keeping	Minimum of three spaces or one space per 200m^2 of use area, whichever is greater.	One SRV space.
Aquaculture	If accepted development subject to requirements: • In the rural or rural residential zones - two spaces; or • Enclosed within a building - one space per 90m^2 of net lettable area. If assessable development: As determined by Council.	If accepted development subject to requirements: Nil. If assessable development: As determined by Council.
Brothel	As determined by Council.	As determined by Council.
Bulk landscape supplies	Minimum of five spaces or one space per 250m^2 of use area, whichever is greater.	One AV if the site has an area of greater than 2,000m^2; or One HRV space.
Car wash	Minimum of two parking spaces plus 1 car queuing space for each car wash or service bay and parking at rates applicable to ancillary use/s.	One AV space.
Caretaker's accommodation	One space per dwelling unit.	Nil.
Cemetery	As determined by Council.	As determined by Council.
Child care centre	A minimum of 3 spaces will be required to be used for setting down and picking up of children, plus one space per 10 children for staff parking.	One SRV space.

Definition	Minimum number of Car parking spaces	Minimum Service Vehicle Space Provision
Club	Minimum of 5 spaces per use or one space per 25m^2 or part thereof of GFA, whichever is greater.	One SRV space; and One HRV space if greater than 500m^2.
Community care centre	Minimum of 5 spaces per use or one space per 25m^2 or part thereof of GFA, whichever is greater.	One SRV space.
Community residence	Three spaces.	Nil.
Community use	Minimum of 5 spaces per use or one space per 50m^2 or part thereof of GFA, whichever is greater.	One SRV space if greater than 500m^2 GFA.
Crematorium	One space per 30m^2 GFA or part thereof.	As determined by Council.
Cropping	<u>If accepted development subject to requirements:</u> Two spaces. <u>If assessable development:</u> As determined by Council.	<u>If accepted development subject to requirements:</u> Nil. <u>If assessable development:</u> As determined by Council.
Detention facility	As determined by Council.	As determined by Council.
Dual occupancy	One covered space per dwelling; and One visitor space.	Nil.
Dwelling house	One covered space per dwelling house. One space per secondary dwelling.	Nil.
Dwelling unit	One covered space per dwelling unit. A minimum of 0.25 spaces per dwelling is to remain in common property for visitor use.	Nil

Definition	Minimum number of Car parking spaces	Minimum Service Vehicle Space Provision
Educational establishment	For all establishments: 1 space per every10 students plus 1 space per employee, and Provision for 3 vehicles for loading and unloading of passengers in addition to the requirements above.	For accepted development subject to requirements: One HRV space; and One SRV space; and A minimum of 3 Bus / coach parking / set down areas. For assessable development: As determined by Council.
Emergency services	Minimum of 5 spaces per use or one space per 25m^2 or part thereof of GFA, whichever is greater.	As determined by Council.
Environment facility	As determined by Council.	As determined by Council.
Extractive industry	As determined by Council.	As determined by Council.
Food and drink outlet	Accepted in an existing building within the Centre zone. Inside the Centre zone: One space per 50m^2 or part thereof of GFA up to 400m^2 GFA and one space per 15m^2 or part thereof of GFA above 400m^2. Outside the Centre zone: One space per 25m^2 or part thereof of GFA up to 400m^2 GFA and one space per 10m^2 or part thereof of GFA above 400m^2. Drive-through: Queuing spaces for 6 passenger vehicles within the site boundaries. One service vehicle space per use or one service vehicle space per 1,000m^2 GFA, whichever is greater.	One HRV space.

Definition	Minimum number of Car parking spaces	Minimum Service Vehicle Space Provision
Function facility	One space per 30m^2 or part thereof of GFA.	One SRV space.
Funeral parlour	Accepted in an existing building within the Centre zone. <u>Inside the Centre zone:</u> One space per 20m^2 or part thereof of GFA up to 400m^2 GFA, and one space per 10m^2 or part thereof of GFA above 400m^2. <u>Outside the Centre zone:</u> One space per 25m^2 or part thereof of GFA up to 400m^2 GFA, and one space per 15m^2 or part thereof of GFA above 400m^2.	One SRV space.
Garden centre	A minimum of 5 spaces for customer parking or one space per 150m^2 or part thereof of use area, whichever is greater. One service vehicle space per use or one service vehicle space per 800m^2 use area, whichever is greater.	One AV if the site has an area of greater than 2,000m^2, otherwise One HRV space.
Hardware and trade supplies	Accepted in an existing building within the Centre zone. <u>Inside the Centre zone:</u> One space per 50m^2 or part thereof of GFA up to 400m^2 GFA, and one space per or part thereof of GFA above 400m^2. <u>Outside the Centre zone:</u> One space per or part thereof of GFA up to 400m^2 GFA, and one space per 15m^2 or part thereof of GFA above 400m^2.	One AV if the site has an area of greater than 2,000m^2, otherwise One HRV space.
Health care services	Accepted in an existing building within the Centre zone. <u>Inside the Centre zone:</u> One space per 40m^2 or part thereof of net lettable area. <u>Outside the Centre zone:</u> One space per 20m^2 of or part thereof of net lettable area.	One SRV space per 500m^2 GFA.

Definition	Minimum number of Car parking spaces	Minimum Service Vehicle Space Provision
High impact industry	One space per 90m^2 GFA or part thereof.	One AV space if the site has an area greater than 2,000m^2, otherwise One HRV.
Home based business	Bed and breakfasts: One space per guest room. Other home based business: One space for home based business and one covered space for the dwelling.	Nil.
Hospital	One space per 6 residential care beds. One space per 4 hostel unit beds. Visitor parking at 30% of resident parking requirements.	One HRV space. One SRV for every 800m^2 of GFA and part thereof; and One space for an emergency vehicle.
Hotel	One space per 10m^2 or part thereof of GFA per bar, beer garden and other public area. One space per 50m^2 or part thereof of GFA per bulk liquor sales area. One space per guest room.	One HRV space.
Indoor sport and recreation	If accepted development subject to requirements: One space per 25m^2 of net lettable area. If assessable development: As determined by Council.	An internal bus set down and pick up area that enables the bus to be in a forward motion at all times whilst onsite Internal dedicated taxi bays provided within 200 metres of the site entrance.

Definition	Minimum number of Car parking spaces	Minimum Service Vehicle Space Provision
Intensive animal industries	If accepted development subject to requirements: Two spaces. If assessable development: As determined by Council.	One SRV space.
Intensive horticulture	If accepted development subject to requirements: Two spaces. If assessable development: As determined by Council.	If accepted development subject to requirements: Nil. If assessable development: As determined by Council.
Landing	As determined by Council.	As determined by Council.
Low impact industry	One space per 90m^2 GFA or part thereof.	One AV space if the site has an area greater than 2,000m^2, otherwise One HRV.
Major electricity infrastructure	As determined by Council.	As determined by Council.
Major sport, recreation and entertainment facility	As determined by Council.	As determined by Council.
Marine industry	One space per 90m^2 GFA or part thereof.	One HRV space if the site has an area greater than 1,000m^2, otherwise One SRV space.
Market	As determined by Council.	As determined by Council.
Medium impact industry	One space per 90m^2 GFA or part thereof.	One AV space if the site has an area greater than 2,000m^2, otherwise One HRV.

Definition	Minimum number of Car parking spaces	Minimum Service Vehicle Space Provision
Motor sport facility	As determined by Council.	As determined by Council.
Multiple dwelling	One covered space per dwelling. One dedicated vehicle wash-down bay for premises containing 5 or more dwellings. A minimum of 0.25 spaces per dwelling is to remain in common property for visitor use.	Nil.
Nature-based tourism	One space per dwelling; or 0.75 spaces per guest room if in dormitory or shared facilities.	As determined by Council.
Nightclub entertainment facility	One space per 60m^2 GFA or part thereof.	Nil.
Non-resident workforce accommodation	One space per dwelling unit.	Nil.
Office	Accepted in an existing building within the Centre zone. <u>Inside the Centre zone:</u> One space per 20m^2 or part thereof of GFA up to 400m^2 GFA, and one space per 10m^2 or part thereof of GFA above 400m^2. <u>Outside the Centre zone:</u> One space per 25m^2 or part thereof of GFA up to 400m^2 GFA, and one space per 15m^2 or part thereof of GFA above 400m^2.	One SRV space.
Outdoor sales	A minimum of 5 spaces for customer parking or one space per 150m^2 of use area, whichever is greater. One service vehicle space per use or one service vehicle space per 800m^2, whichever is greater.	One AV if the site has an area of greater than 2,000m^2, otherwise One HRV space.

Definition	Minimum number of Car parking spaces	Minimum Service Vehicle Space Provision
Outdoor sport and recreation	Coursing, horse racing, pacing or trotting: • One space per five seated spectators; plus • One space per 5m^2 of other spectator areas. Football: • 50 spaces per field. Lawn bowls: • 30 spaces per green. Swimming pool: • 15 spaces; plus • One space per 100m^2 of useable site area. Tennis or other Court: • Four spaces per court. Golf Course: • Four spaces per tee on the course; plus • One space per 50m^2 of net lettable area. <u>Any other use:</u> As determined by council.	An internal bus set down and pick up area that enables the bus to be in a forward motion at all times whilst onsite Internal dedicated taxi bays provided within 200 metres of the site entrance.
Park	As determined by Council.	As determined by Council.
Parking station	Not applicable	Nil.
Permanent plantation	<u>If accepted development subject to requirements:</u> Two spaces. <u>If assessable development:</u> As determined by Council.	<u>If accepted development subject to requirements:</u> Nil. <u>If assessable development:</u> As determined by Council.
Place of worship	Minimum of 5 spaces per use or one space per 25m^2 or part thereof of GFA, whichever is greater.	One SRV space.
Port services	As determined by Council.	As determined by Council.
Relocatable home park	One space for each home site plus 1 space for each 5 home sites or part thereof for visitors.	One HRV space.

Definition	Minimum number of Car parking spaces	Minimum Service Vehicle Space Provision
Renewable energy facility	As determined by Council.	As determined by Council.
Research and technology industry	One space per 90m^2 GFA or part thereof.	One HRV space if the site has an area greater than 1,000m^2, otherwise One SRV space.
Residential care facility	One space per 4 hostel unit beds. Visitor parking at 30% of resident parking requirements.	One SRV space; and One space for an emergency vehicle.
Resort complex	As determined by Council.	As determined by Council.
Retirement facility	One covered space per unit and 0.5 spaces for visitors parking.	One SRV space; and One space for an emergency vehicle.
Roadside stall	One space per stall.	Nil.
Rooming accommodation	Inside the Centre zone: One space per 15 beds. Outside the Centre zone: One space per 8 beds.	One SRV space. One space for a 20 seater bus.
Rural industry	One space per 90m^2 GFA or part thereof.	One AV space.
Rural workers' accommodation	If accepted development subject to requirements: Nil If Assessable development: As determined by Council.	If accepted development subject to requirements: Nil If Assessable development: As determined by Council.
Sales office	One space per 25m^2 GFA or part thereof.	Nil.

Definition	Minimum number of Car parking spaces	Minimum Service Vehicle Space Provision
Service industry	Accepted where in an existing building within the Centre zone. Inside the Centre zone: One space per 50m^2 or part thereof of GFA up to 400m^2 GFA, and one space per 10m^2 or part thereof of GFA above 400m^2. Outside the Centre zone: One space per 25m^2 or part thereof of GFA up to 400m^2 GFA, and one space per 15m^2 or part thereof of GFA above 400m^2.	One HRV space if the site is greater than 2,000m^2, otherwise One SRV space.
Service station	Minimum of four spaces plus car parking at rates applicable to ancillary use/s.	One AV space.
Shop	Accepted where in an existing building within the Centre zone. Inside the Centre zone: One space per 50m^2 or part thereof of GFA up to 400m^2 GFA, and one space per 10m^2 or part thereof of GFA above 400m^2. Outside the Centre zone: One space per 25m^2 or part thereof of GFA up to 400m^2 GFA, and one space per 15m^2 or part thereof of GFA above 400m^2.	One HRV space if the site is greater than 2,000m^2, otherwise One SRV space.
Shopping centre	Inside the Centre zone: One space per 50m^2 or part thereof of GFA up to 400m^2 GFA and one space per 25m^2 or part thereof of GFA above 400m^2. Outside the Centre zone: One space per 25m^2 or part thereof of GFA up to 400m^2 GFA and one space per 15m^2 or part thereof of GFA above 400m^2.	One AV space per 1,000m^2; and One SRV space per 500m^2; or One SRV space per every 2 specialty uses, whichever the greater.
Short-term accommodation	One space per unit.	One HRV space if involves the serving of food or beverage; otherwise One SRV space.

Definition	Minimum number of Car parking spaces	Minimum Service Vehicle Space Provision
Showroom	Accepted in an existing building within the Centre zone. Inside the Centre zone: One space per 25m^2 or part thereof of GFA up to 400m^2 GFA, and one space per 10m^2 or part thereof of GFA above 400m^2. Outside the Centre zone: One space per 50m^2 or part thereof of GFA up to 400m^2 GFA, and one space per 15m^2 or part thereof of GFA above 400m^2.	One AV space and One SRV space if the site is greater than 2,000m^2; or One HRV space; and One SRV Space.
Special industry	One space per 90m^2 GFA or part thereof.	One AV space if the site has an area greater than 2,000m^2, otherwise One HRV.
Substation	If assessable development: As determined by Council.	As determined by Council.
Telecommunications facility	If accepted development subject to requirements: Nil. If assessable development: As determined by Council.	If accepted development subject to requirements: Nil. If assessable development: As determined by Council.
Theatre	One space per 15m^2 or part thereof of net lettable area, or one space per 5 seated spectators whichever is the greater.	One SRV space.
Tourist attraction	As determined by Council.	As determined by Council.

Definition	Minimum number of Car parking spaces	Minimum Service Vehicle Space Provision
Tourist park	One space within each accommodation site plus 1 additional visitor space per 10 accommodation sites. Queuing for 2 vehicles towing caravans and 1 holding bay for a vehicle towing a caravan plus additional queuing for 1 vehicle towing a caravan per 40 accommodation sites.	One HRV space.
Transport depot	One space per 125m^2 GFA or part thereof.	One AV space if the site has an area greater than 2,000m^2, otherwise One HRV.
Utility installation	<u>If accepted development subject to requirements:</u> Nil. <u>If assessable development:</u> As determined by Council.	<u>If accepted development subject to requirements:</u> Nil. <u>If assessable development:</u> As determined by Council.
Veterinary services	Accepted in an existing building within the Centre zone. <u>Inside Centre zone:</u> One space per 40m^2 or part thereof of net lettable area. <u>Outside Centre zone:</u> One space per 20m^2 or part thereof of net lettable area.	One HRV space if greater than 500m^2 GFA; and One SRV space per 500m^2 GFA.
Warehouse	One space per 90m^2 GFA or part thereof.	One AV space if the site has an area greater than 2,000m^2, otherwise One HRV.
Wholesale nursery	As determined by Council.	As determined by Council.
Winery	As determined by Council.	As determined by Council.

Note—Any use not herein defined - as determined by Council.

Table 9.4.3.3C—Pavement Standards for Access, Manoeuvring and Car Parking areas

Zone	Compacted Gravel Base (minimum thickness)	Surfacing Options
All development other than dwelling house		
All zones other than the Conservation zone or the Rural zone	75mm	Reinforced concrete with a minimum thickness of: • 100mm for parking areas; and • 150mm for access ways.
	150mm	Asphalt with a minimum thickness of 25mm
	150mm	Two coat sprayed bitumen seal
	150mm	Concrete pavers
Conservation zone or Rural zone	Not applicable	Minimum 150mm thickness compacted gravel suitable for all weather and dust free
Dwelling house		
All zones	75mm	Reinforced concrete with a minimum thickness of: • 100mm for parking areas; and • 150mm for access ways.
	150mm	Asphalt with a minimum thickness of 25mm
	150mm	Two coat sprayed bitumen seal
	150mm	Concrete pavers
	Not applicable	Minimum 150mm thickness compacted gravel suitable for all weather and dust free

Note—Where more than one surfacing option is listed, any one of the treatments listed may be provided.

Table 9.4.3.3D—Bicycle Parking and End of Trip Facility Requirements

Definition	Minimum number of bicycle parking spaces	Minimum end of trip facilities
Commercial activities	New or redeveloped commercial activities buildings (other than a shopping centre), provide: • For employees - secure bicycle storage for 8% of building staff (based on one person per 60m^2 Gross leasable area). Secure bicycle parking involves a bicycle locker or bicycle rail in a locked compound/cage; and • visitor facilities: - one bicycle rack space per 750m^2 NLA or part thereof; and - bicycle parking, signposted; and adjacent to a major public entrance to the building.	New or redeveloped commercial activities buildings (other than a shopping centre), provide the following employee facilities, which are continually accessible to employees: • accessible showers at the rate of one shower per 10 bicycle spaces provided or part thereof; • changing facilities adjacent to showers; and • secure lockers in the changing facilities for 20% of building staff (based on one person per 60m^2 GLA to cater for walkers, cyclists and other active users.
Community use	Four spaces per 1,500m^2 GFA.	As determined by Council.

Definition	Minimum number of bicycle parking spaces	Minimum end of trip facilities
Educational establishment	New or redeveloped education facilities, provide: • For employees - secure bicycle storage for 8% of building staff (based on one person per 75m^2 GLA). Secure bicycle parking involves a bicycle locker or bicycle rail in a locked compound/cage; and • For students: - minimum of 8%of the peak number of students using the building at any one time (with 75% occupancy); and - bicycle storage within 100m of the building front entrance(s); or added to the campus central bicycle storage area.	New or redeveloped education facilities, provide the following employee facilities, which are continually accessible to employees: • accessible showers at the rate of one per 10 bicycle spaces provided or part thereof; • changing facilities adjacent to showers; and • secure lockers in changing facilities for 20% of building staff (based on one person per 75m^2 GLA) to cater for cyclists, walkers and other active users.
Food & drink outlet	One space per 100m^2 GFA.	As determined by Council.
Function facility	One space per 300m^2 GFA.	As determined by Council.

Definition	Minimum number of bicycle parking spaces	Minimum end of trip facilities
Health care services	New or redeveloped healthcare facilities, provide the following facilities: • For employees - secure bicycle storage for 5% of building staff (based on one person per 75m^2 GLA). Secure bicycle parking involves a bicycle locker or bicycle rail in a locked compound/cage; and • For visitors: - facilities with in-patient accommodation provide one space per each 30 beds; - facilities without in-patient accommodation provide one space per each 4 practitioners; - aged care facilities provide one space per each 60 beds; - In every instance above, provide a minimum of 5 bicycle parking spaces; and - bicycle parking provided: in an accessible location, signposted and within 10m a major public entrance to the building.	New or redeveloped healthcare facilities, provide the following employee facilities, which are continually accessible to employees: • accessible showers at the rate of one per 10 bicycle spaces provided or part thereof; • changing facilities adjacent to showers; and • secure lockers in changing facilities for 20% of building staff (based on one person per 75m^2 GLA) to cater for cyclists, walkers and other active users.
Hospital	As determined by Council.	As determined by Council.
Indoor sport and recreation	One space per employee plus 1 space per 200m^2 GFA	As determined by Council.
Park	As determined by Council.	As determined by Council.
Rooming accommodation	One space per 4 letting rooms.	As determined by Council.

Definition	Minimum number of bicycle parking spaces	Minimum end of trip facilities
Short term accommodation	One space per 4 letting rooms.	As determined by Council.
Shop or Shopping centre	New or redeveloped shopping centres, provide: • For employees - secure bicycle storage for 8% of building staff (based on one person per 60m^2 Gross leasable area). Secure bicycle parking involves a bicycle locker or bicycle rail in a locked compound/cage; and • visitor facilities: - one space per 500m^2 GLA or part thereof for centres under 30,000m^2; or - one space per 750m^2 GLA or part thereof for centres between 30,000m^2 and 50,000m^2; and - bicycle parking is signposted and within 10m of a major public entrance to the building.	New or redeveloped shopping centres, provide the following employee facilities, which are continually accessible to employees: • accessible showers at the rate of one shower per 10 bicycle spaces provided or part thereof; • changing facilities adjacent to showers; and • secure lockers in the changing facilities for 20% of building staff (based on one person per 60m^2 GLA to cater for walkers, cyclists and other active users.
Theatre	One space per 100m^2 GFA.	As determined by Council.

Table 9.4.3.3E—Vehicular Access for Specific Uses

Use	Design
Dwelling house	A secondary dwelling shares a vehicle crossover with the Dwelling house.
Car wash Service station	Site access involves: (a) a maximum width of 9 metres of any vehicle crossover across a footpath; (b) a minimum separation of 12 metres between any vehicle crossover and a road intersection; (c) a separate entrance and exit; and (d) a minimum separation between vehicle crossovers of 14 metres.

Industrial activities	Each lot is provided with no more than one access point every 15 metres.
Roadside stall	A single vehicular access point is provided to the site.
Tourist park	(a) a single vehicular access point is provided to the site; and (b) no accommodation site has individual vehicular access.

9.4.4 Reconfiguring a lot code

9.4.4.1 Application

(1) This code applies to assessing development where:
  (a) for Reconfiguring a lot; and
  (b) it is identified in the assessment benchmarks for assessable development and requirements for accepted development column of an assessment table in Part 5 of the planning scheme.

9.4.4.2 Purpose

(1) The purpose of the Reconfiguring a lot code is to ensure that land is:
  (a) arranged in a manner which is consistent with the intended scale and intensity of development within the area;
  (b) provided with access to appropriate movement and open space networks; and
  (c) contributes to housing diversity and accommodates a range of land uses.

(2) The purpose of the code will be achieved through the following overall outcomes:
  (a) Subdivision of land achieves the efficient use of land and the efficient provision of infrastructure and transport services;
  (b) Lots are of a suitable size and shape for the intended or potential use having regard to the purpose and overall outcomes of the relevant zone or precinct.
  (c) Subdivision of land creates lots with sufficient area and dimensions to accommodate the ultimate use, meet user requirements, protect environmental features and account for site constraints;
  (d) A range and mix of lot sizes is provided to facilitate a variety of industry and housing types;
  (e) Subdivision design incorporates a road network that provides connectivity and circulation for vehicles and provide safe and efficient access for pedestrians, cyclists and public transport;
  (f) Subdivision design provides opportunities for walking and cycling for recreation and as alternative methods of travel;
  (g) Subdivision of land provides and integrates a range of functional parkland, including local and district parks and open space links for the use and enjoyment of the residents of the locality and the shire;
  (h) Subdivision of land contributes to an open space network that achieves connectivity along riparian corridors and between areas with conservation values;
  (i) Subdivision within the Rural zone maintains lots equal to or larger than 60ha, except for where:
    (a) The subdivision results in no additional lots (boundary realignment) and does not create an additional *rural lifestyle* lot or *rural residential purposes* lot; or
    (b) The subdivision is limited to the creation of one additional allotment to accommodate a *public reconfiguration purpose*;
  (j) Land in historical townships is not reconfigured to be used for urban purposes; and
  (k) Residential subdivision and greenfield development is designed to consider and respect:
    i. topography;
    ii. climate responsive design and solar orientation;
    iii. efficient and sustainable infrastructure provision;
    iv. environmental values;
    v. water sensitive urban design;
    vi. good quality agricultural land; and
    vii. the character and scale of surrounding development.

9.4.4.3 Criteria for assessment

Table 9.4.4.3A—Reconfiguring a lot code – For assessable development

Performance outcomes	Acceptable outcomes	Complies	Comments
Area and frontage of lots – except for Rural zone			
PO1 Lots include an area and frontage that: (a) is consistent with the design of lots in the surrounding area; (b) allows the desired amenity of the zone to be achieved; (c) is able to accommodate all buildings, structures and works associated with the intended land use; (d) allow the site to be provided with sufficient access; (e) considers the proximity of the land to: (i) centres; (ii) public transport services; and (iii) open space; and (f) allows for the protection of environmental features; and (g) accommodates site constraints.	**AO1.1** Lots provide a minimum area and frontage in accordance with **Table 9.4.4.3B**.	✔	The site is within the Centre zone. Table 9.4.4.3B calls for a minimum lot size of 800m2 and a minimum road frontage of 20 metres. The proposed lots exceed 800m2 in area and greater than 20 metres of road frontage.
Area and frontage of lots – Rural zone			

Performance outcomes	Acceptable outcomes	Complies	Comments
PO1.1 No lots are created with an area of less than 60ha, except for where: (a) The subdivision results in no additional lots (boundary realignment) and does not create an additional *rural lifestyle* lot or *rural residential purposes* lot; or (b) The subdivision is limited to the creation of one additional allotment to accommodate a *public reconfiguration purpose*. Note: This also applies to applications for boundary realignment.	**AO1.1** No acceptable outcome is provided.	n/a	Not applicable.
PO1.2 Where for a boundary realignment, the realignment only occurs where it would: (a) Improve agricultural efficiency; or (b) Facilitate agricultural activity or conservation outcomes; or (c) Resolve boundary issues where a house, structure or works is built over the boundary line of the lots.	**AO1.2** No acceptable outcome is provided.	n/a	Not applicable.

Performance outcomes	Acceptable outcomes	Complies	Comments
PO1.3 Where for a boundary realignment, the proposed lots are: (a) Able to accommodate all buildings, structures and works associated with the rural use; (b) Suitable to allow the site to be provided with sufficient access; (c) Include enough space within the new lots to accommodate buffers from adjoining land uses to mitigate adverse impacts such as chemical spray drift, odour, noise, fire, smoke and ash; (d) Do not constrain existing industries from expanding or new agricultural enterprises from being established; (e) Do not create new lots for *rural lifestyle* or *rural residential purposes*; and (f) Are not for the purposes of creating a separate house lot.	**AO1.3** No acceptable outcome is provided.	n/a	Not applicable.

Performance outcomes	Acceptable outcomes	Complies	Comments
PO1.4 Where for the creation of one additional lot to accommodate a *public reconfiguration purpose*: (a) The lot has sufficient area to be able to accommodate all buildings, structures and works associated with the intended use; and (b) The intended use commences on the lot prior to its creation, or a statutory covenant is registered on the title restricting the future use of the lot to the intended purpose.	**AO1.4** No acceptable outcome is provided.	n/a	Not applicable.
PO1.5 Reconfiguring a lot that is severed by a gazetted road and that uses the road as the boundary of division only occurs where: (a) The subdivision divides one lot into two; and (b) The existing lot is severed by a road that was gazetted before 9 May 2008; and (c) The resulting lot boundaries use the road as the boundary of division; and (d) The development: (i) facilitates agricultural activity; or (ii) facilitates conservation outcomes; and (e) The development ensures agricultural activity is not compromised.	**AO1.5** No acceptable outcome is provided.	n/a	Not applicable.

Performance outcomes	Acceptable outcomes	Complies	Comments
PO1.6 All lots include a frontage that allows the site to be provided with sufficient access.	**AO1.6** Lots provided a minimum frontage is accordance with **Table 9.4.4.3B**	n/a	Not applicable.
Existing buildings and easements			
PO2 Reconfiguring a lot which contains existing land uses or existing buildings and structures ensures: (a) new lots are of sufficient area and dimensions to accommodate existing land uses, buildings and structures; and (b) any continuing use is not compromised by the reconfiguration.	**AO2.1** Each land use and associated infrastructure is contained within its individual lot.	✔	The development complies.
	AO2.2 All lots containing existing buildings and structures achieve the setback requirements of the relevant zone.	✔	A 3 metre (fire separation) setback will be conditioned between the dwelling house and the proposed side boundary.
PO3 Reconfiguring a lot which contains an existing easement ensures: (a) future buildings, structures and accessways are able to be sited to avoid the easement; and (b) the reconfiguration does not compromise the purpose of the easement or the continued operation of any infrastructure contained within the easement.	**AO3** No acceptable outcome is provided.	n/a	Not applicable.
Boundary realignment			
PO4 The boundary realignment retains all attendant and existing infrastructure connections and potential connections.	**AO4** No acceptable outcome is provided.	n/a	Not applicable.
Access and road network			

Performance outcomes	Acceptable outcomes	Complies	Comments
PO5 Access to a reconfigured lot (including driveways and paths) must not have an adverse impact on: (a) safety; (b) drainage; (c) visual amenity; (d) privacy of adjoining premises; and (e) service provision.	**AO5** No acceptable outcome is provided.	✔	The development will be conditioned to comply.
PO6 Reconfiguring a lot ensures that access to a lot can be provided that: (a) is consistent with that provided in the surrounding area; (b) maximises efficiency and safety; and (c) is consistent with the nature of the intended use of the lot. Note—The Parking and access code should be considered in demonstrating compliance with PO6.	**AO6** Vehicle crossover and access is provided in accordance with the design guidelines and specifications set out in Planning Scheme Policy 4 – FNQROC Regional Development Manual.	✔	The development will be conditioned to comply.
PO7 Roads in the Industry zone are designed having regard to: (a) the intended use of the lots; (b) the existing use of surrounding land; (c) the vehicular servicing requirements of the intended use; (d) the movement and turning requirements of B-Double vehicles. Note—The Parking and access code should be considered in demonstrating compliance with PO7.	**AO7** No acceptable outcome is provided.	n/a	Not applicable.
Rear lots			

Performance outcomes	Acceptable outcomes	Complies	Comments
PO8 Rear lots are designed to: (a) provide a high standard of amenity for residents and other users of the site; (b) provide a high standard of amenity for adjoining properties; and (c) not adversely affect the safety and efficiency of the road from which access is gained.	**AO8.1** Rear lots are designed to facilitate development that adjoins or overlooks a park or open space.	n/a	Not applicable.
	AO8.2 No more than two rear lots are created behind any lot with a road frontage.	n/a	Not applicable.
	AO8.3 Access to lots is via an access strip with a minimum width of: (a) 4 metres where in the Low density residential zone or Medium density residential zone; or (b) 8 metres otherwise.	n/a	Not applicable.
	AO8.4 A single access strip is provided to a rear lot along one side of the lot with direct frontage to the street. Note—Figure A provides further guidance in relation to the desired outcome.	n/a	Not applicable.
	AO8.5 No more than 1 in 10 lots created in a new subdivision are rear lots.	n/a	Not applicable.
	AO8.6 Rear lots are not created in the Centre zone or the Industry zone.	n/a	Not applicable.
Crime prevention and community safety			

Performance outcomes	Acceptable outcomes	Complies	Comments
PO9 Development includes design features which enhance public safety and seek to prevent opportunities for crime, having regard to: (a) sightlines; (b) the existing and intended pedestrian movement network; (c) the existing and intended land use pattern; and (d) potential entrapment locations.	**AO9** No acceptable outcome is provided.	n/a	Not applicable.
Pedestrian and cycle movement network			
PO10 Reconfiguring a lot must assist in the implementation of a Pedestrian and cycle movement network to achieve safe, attractive and efficient pedestrian and cycle networks.	**AO10** No acceptable outcome is provided.	n/a	Not applicable.
Public transport network			
PO11 Where a site includes or adjoins a future public transport corridor or future public transport site identified through a structure planning process, development: (a) does not prejudice the future provision of the identified infrastructure; (b) appropriately treats the common boundary with the future corridor; and (c) provides opportunities to integrate with the adjoining corridor where a it will include an element which will attract pedestrian movement.	**AO11** No acceptable outcome is provided.	n/a	Not applicable.

Performance outcomes	Acceptable outcomes	Complies	Comments
Residential subdivision			
PO12 Residential lots are: (a) provided in a variety of sizes to accommodate housing choice and diversity; and (b) located to increase variety and avoid large areas of similar lot sizes.	**AO12** No acceptable outcome is provided.	n/a	Not applicable.
Rural residential zone			
PO13 New lots are only created in the Rural residential zone where land is located within the 4,000m^2 precinct, the 1 hectare precinct or the 2 hectare precinct.	**AO13** No acceptable outcome is provided.	n/a	Not applicable.
Additional provisions for greenfield development only			
PO14 The subdivision design provides the new community with a local identity by responding to: (a) site context (b) site characteristics (c) setting (d) landmarks (e) natural features; and (f) views.	**AO14** No acceptable outcome provided.	n/a	Not applicable.
PO15 The road network is designed to provide a high level of connectivity, permeability and circulation for local vehicles, public transport, pedestrians and cyclists.	**AO15** No acceptable outcome provided.	n/a	Not applicable.

Performance outcomes	Acceptable outcomes	Complies	Comments
PO16 The road network is designed to: (a) minimise the number of cul-de-sacs; (b) provide walkable catchments for all residents in cul-de-sacs; and (c) include open cul-de-sacs heads. Note—Figure B provides further guidance in relation to the desired outcome.	**AO16** No acceptable outcome provided.	n/a	Not applicable.
PO17 Reconfiguring a lot provides safe and convenient access to the existing or future public transport network.	**AO17** The subdivision locates 90% of lots within 400 metres walking distance of a future public transport route.	n/a	Not applicable.
PO18 The staging of the lot reconfiguration prioritises delivery of link roads to facilitate efficient bus routes.	**AO18** No acceptable outcome provided.	n/a	Not applicable.
PO19 Provision is made for sufficient open space to: (a) meet the needs of the occupiers of the lots and to ensure that the environmental and scenic values of the area are protected; (b) retain riparian corridors, significant vegetation and habitat areas and provides linkages between those areas; and (c) meet regional, district and neighbourhood open space requirements.	**AO19.1** A minimum of 10% of the site area is dedicated as open space.	n/a	Not applicable.
	AO19.2 A maximum of 30% of the proposed open space can consist of land identified as significant vegetation or riparian corridor buffer.	n/a	Not applicable.

Performance outcomes	Acceptable outcomes	Complies	Comments
PO20 A network of parks and community land is provided: (a) to support a full range of recreational and sporting activities; (b) to ensure adequate pedestrian, cycle and vehicle access; (c) which is supported by appropriate infrastructure and embellishments; (d) to facilitate links between public open spaces; (e) which is co-located with other existing or proposed community infrastructure; (f) which is consistent with the preferred open space network; and (g) which includes a diversity of settings;	**AO20** No acceptable outcome is provided.	n/a	Not applicable.

Table 9.4.4.3B—Minimum area and dimensions for Reconfiguring a lot

Zone	Type	Minimum area	Minimum frontage
Centre	All lots	800m^2	20 metres
Community facilities	All lots	Not specified	Not specified
Conservation	All lots	Not specified	Not specified
Emerging community	All lots	10 hectares	100 metres
Low density residential	Where greenfield development and connected to reticulated water and sewerage		
	Rear lot	800m^2	5 metres
	All other lots	350m^2	10 metres
	Where connected to reticulated water and sewerage		
	Rear lot	800m^2	5 metres
	All other lots	600m^2	16 metres
	Where connected to reticulated water		
	Rear lot	1,000m^2	5 metres
	All other lots	800m^2	16 metres
Medium density residential	Rear lot	600m^2	5 metres
	All other lots	400m^2	10 metres

Zone	Type	Minimum area	Minimum frontage
Industry	All lots	1,500m^2	45 metres
Recreation and open space	All lots	Not specified	Not specified
Rural	All lots	60 hectares	400 metres
Rural residential	2 hectare precinct		
	All lots	2 hectares	60 metres
	1 hectare precinct		
	All lots	1 hectare	40 metres
	4,000m^2 precinct		
	All lots	4,000m^2	40 metres

Figure A – Examples of access to rear lots


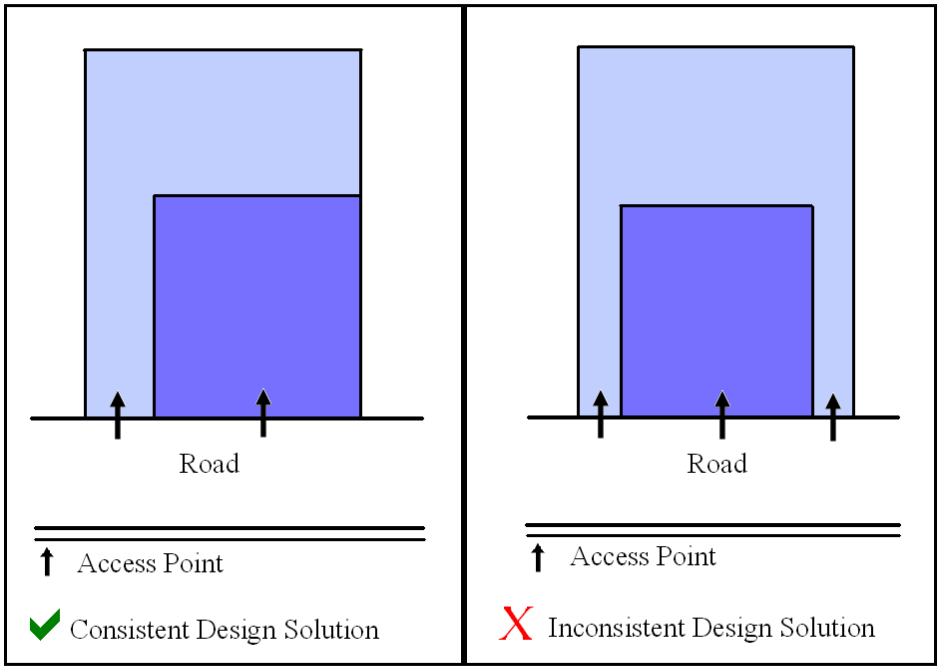


Figure B – Example of cul-de-sac design

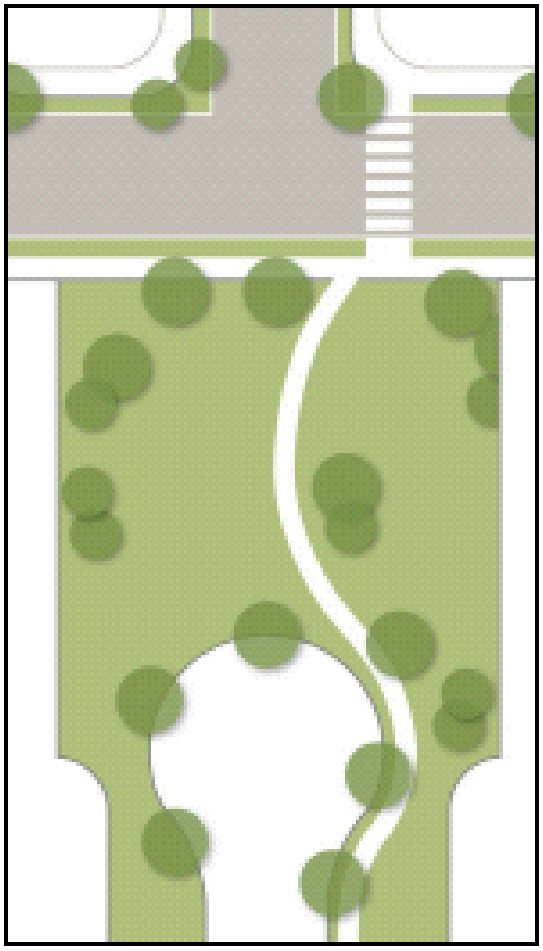

9.4.5 Works, services and infrastructure code

9.4.5.1 Application

(1) This code applies to assessing development where it is identified in the assessment benchmarks for assessable development and requirements for accepted development column of an assessment table in Part 5 of the planning scheme.

9.4.5.2 Purpose

(1) The purpose of the Works, services and infrastructure code is to ensure that all development is appropriately serviced by physical infrastructure, public utilities and services and that work associated with development is carried out in a manner that does not adversely impact on the surrounding area.

(2) The purpose of the code will be achieved through the following overall outcomes:
- (a) Development provides an adequate, safe and reliable supply of potable, fire-fighting and general use water in accordance with relevant standards;
- (b) Development provides for the treatment and disposal of wastewater and ensures there are no adverse impacts on water quality, public health, local amenity or ecological processes;
- (c) Development provides for the disposal of stormwater and ensures that there are no adverse impacts on water quality or ecological processes;
- (d) Development connects to the road network and any adjoining public transport, pedestrian and cycle networks while ensuring no adverse impacts on the safe, convenient and efficient operation of these networks;
- (e) Development provides electricity and telecommunications services that meet its desired requirements;
- (f) Development is connected to a nearby electricity network with adequate capacity without significant environment, social or amenity impact;
- (g) Development does not affect the efficient functioning of public utility mains, services or installations;
- (h) Infrastructure dedicated to Council is cost effective over its life cycle;
- (i) Work associated with development does not cause adverse impacts on the surrounding area; and
- (j) Development prevents the spread of weeds, seeds or other pests.

9.4.5.3 Criteria for assessment

Table 9.4.5.3 - Works, services and infrastructure code – For accepted development subject to requirements and assessable development

Performance outcomes	Acceptable outcomes	Complies	Comments
For accepted development subject to requirements and assessable development			
Water supply			

Performance outcomes	Acceptable outcomes	Complies	Comments
PO1 Each lot has an adequate volume and supply of water that: (a) meets the needs of users; (b) is adequate for fire-fighting purposes; (c) ensures the health, safety and convenience of the community; and (d) minimises adverse impacts on the receiving environment.	**AO1.1** Development is connected to a reticulated water supply system in accordance with the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional Development Manual other than where located: (a) in the Conservation zone, Rural zone or Rural residential zone; and (b) outside a reticulated water supply service area.	✔	The development will be conditioned to comply.
	AO1.2 Development, where located outside a reticulated water supply service area and in the Conservation zone, Rural zone or Rural residential zone is provided with: (a) a bore or bores are provided in accordance with the Design Guidelines set out in the Planning Scheme Policy 4 – FNQROC Regional Development Manual; or (b) on-site water storage tank/s: (i) with a minimum capacity of 90,000L; (ii) fitted with a 50mm ball valve with a camlock fitting; and (iii) which are installed and connected prior to the occupation or use of the development.	n/a	Not applicable.
Wastewater disposal			

Performance outcomes	Acceptable outcomes	Complies	Comments
PO2 Each lot provides for the treatment and disposal of effluent and other waste water that: (a) meets the needs of users; (b) is adequate for fire-fighting purposes; (c) ensures the health, safety and convenience of the community; and (d) minimises adverse impacts on the receiving environment.	**AO2.1** Development is connected to a reticulated sewerage system in accordance with the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional Development Manual other than where located: (a) in the Conservation zone, Rural zone or Rural residential zone; and (b) outside a reticulated sewerage service area.	n/a	Not applicable.
	AO2.2 An effluent disposal system is provided in accordance with ASNZ 1547 On-Site Domestic Wastewater Management (as amended) where development is located: (a) in the Conservation zone, Rural zone or Rural residential zone; and (b) outside a reticulated sewerage service area.	✔	The development will be conditioned to comply.
Stormwater infrastructure			
PO3 Stormwater infrastructure is designed and constructed to collect and convey the design storm event to a lawful point of discharge in a manner that mitigates impacts on life and property.	**AO3.1** Where located within a Priority infrastructure area or where stormwater infrastructure is available, development is connected to Council's stormwater network in accordance with the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional Development Manual.	✔	The development will be conditioned to comply.

Performance outcomes	Acceptable outcomes	Complies	Comments
	AO3.2 On-site drainage systems are constructed: (a) to convey stormwater from the premises to a lawful point of discharge; and (b) in accordance with the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional Development Manual.	✔	The development will be conditioned to comply.
Electricity supply			
PO4 Each lot is provided with an adequate supply of electricity	**AO4** The premises: (a) is connected to the electricity supply network; or (b) has arranged a connection to the transmission grid; or (c) where not connected to the network, an independent energy system with sufficient capacity to service the development (at near average energy demands associated with the use) may be provided as an alternative to reticulated electricity where: (i) it is approved by the relevant regulatory authority; and (ii) it can be demonstrated that no air or noise emissions; and (iii) it can be demonstrated that no adverse impact on visual amenity will occur.	✔	The development will be conditioned to comply.
Telecommunications infrastructure			

Performance outcomes	Acceptable outcomes	Complies	Comments
PO5 Each lot is provided with an adequate supply of telecommunication infrastructure	**AO5** Development is provided with a connection to the national broadband network or telecommunication services.	✔	The development will be conditioned to comply.
Existing public utility services			
PO6 Development and associated works do not affect the efficient functioning of public utility mains, services or installations.	**AO6** Public utility mains, services are relocated, altered or repaired in association with the works so that they continue to function and satisfy the relevant Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional Development Manual.	✔	The development will be conditioned to comply.
Excavation or filling			
PO7 Excavation or filling must not have an adverse impact on the: (a) streetscape; (b) scenic amenity; (c) environmental values; (d) slope stability; (e) accessibility; or (f) privacy of adjoining premises.	**AO7.1** Excavation or filling does not occur within 1.5 metres of any site boundary.	n/a	Not applicable.
	AO7.2 Excavation or filling at any point on a lot is to be no greater than 1.5 metres above or below natural ground level.	n/a	Not applicable.
	AO7.3 Earthworks batters: (a) are no greater than 1.5 metres in height; (b) are stepped with a minimum width 2 metre berm; (c) do not exceed a maximum of two batters and two berms (not greater than 3.6 metres in total height) on any one lot; (d) have a slope no greater than 1 in 4; and (e) are retained.	n/a	Not applicable.

Performance outcomes	Acceptable outcomes	Complies	Comments
	AO7.4 Soil used for filling or spoil from excavation is not stockpiled in locations that can be viewed from: (a) adjoining premises; or (b) a road frontage, for a period exceeding 1 month from the commencement of the filling or excavation.	n/a	Not applicable.
	AO7.5 All batters and berms to be constructed in accordance with the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional Development Manual.	n/a	Not applicable.
	AO7.6 Retaining walls have a maximum height of 1.5 metres and are designed and constructed in accordance with the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional Development manual.	n/a	Not applicable.
	AO7.7 Excavation or filling at any point on a lot is to include measures that protect trees at the foot or top of cut or fill batters by the use of appropriate retaining methods and sensitive earth removal or placement and in accordance with the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional Development manual.	n/a	Not applicable.
For assessable development			
Transport network			

Performance outcomes	Acceptable outcomes	Complies	Comments
PO8 The development has access to a transport network of adequate standard to provide for the safe and efficient movement of vehicles, pedestrians and cyclists.	**AO8.1** Vehicle access, crossovers, road geometry, pavement, utilities and landscaping to the frontage/s of the site are designed and constructed in accordance with the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional Development manual.	✔	The development will be conditioned to comply.
	AO8.2 Development provides footpath pavement treatments in accordance with Planning Scheme Policy 9 – Footpath Paving.	n/a	Not applicable.
Public infrastructure			
PO9 The design, construction and provision of any infrastructure that is to be dedicated to Council is cost effective over its life cycle and incorporates provisions to minimise adverse impacts.	**AO9** Development is in accordance with the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional Development Manual.	✔	The development will be conditioned to comply.
Stormwater quality			

Performance outcomes	Acceptable outcomes	Complies	Comments
PO10 Development has a non-worsening effect on the site and surrounding land and is designed to: (a) optimise the interception, retention and removal of waterborne pollutants, prior to the discharge to receiving waters; (b) protect the environmental values of waterbodies affected by the development, including upstream, on-site and downstream waterbodies; (c) achieve specified water quality objectives; (d) minimise flooding; (e) maximise the use of natural channel design principles; (f) maximise community benefit; and (g) minimise risk to public safety.	**AO10.1** The following reporting is prepared for all Material change of use or Reconfiguring a lot proposals: (a) a Stormwater Management Plan and Report that meets or exceeds the standards of design and construction set out in the Queensland Urban Drainage Manual (QUDM) and the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional Development Manual; and (b) an Erosion and Sediment Control Plan that meets or exceeds the Soil Erosion and Sedimentation Control Guidelines (Institute of Engineers Australia), including: (i) drainage control; (ii) erosion control; (iii) sediment control; and (iv) water quality outcomes.	✔	The development will be conditioned to comply.

Performance outcomes	Acceptable outcomes	Complies	Comments
	AO10.2 For development on land greater than 2,500m^2 or that result in more than 5 lots or more than 5 dwellings or accommodation units, a Stormwater Quality Management Plan and Report prepared and certified by a suitably qualified design engineer (RPEQ) is prepared that demonstrates that the development: (a) meets or exceeds the standards of design and construction set out in the Urban Stormwater Quality Planning Guideline and the Queensland Water Quality Guideline; (b) is consistent with any local area stormwater water management planning; (c) accounts for development type, construction phase, local climatic conditions and design objectives; and (d) provides for stormwater quality treatment measures reflecting land use constraints, such as soil type, landscape features (including landform), nutrient hazardous areas, acid sulfate soil and rainfall erosivity.	✔	The development will be conditioned to comply.

Performance outcomes	Acceptable outcomes	Complies	Comments
PO11 Storage areas for stormwater detention and retention: (a) protect or enhance the environmental values of receiving waters; (b) achieve specified water quality objectives; (c) where possible, provide for recreational use; (d) maximise community benefit; and (e) minimise risk to public safety.	**AO11** No acceptable outcome is provided.	n/a	Not applicable.
Excavation or filling			
PO12 Traffic generated by filling or excavation does not impact on the amenity of the surrounding area.	**AO12.1** Haul routes used for transportation of fill to or from the site only use major roads and avoid residential areas.	n/a	Not applicable.
	AO12.2 Transportation of fill to or from the site does not occur: (a) within peak traffic times; and (b) before 7am or after 6pm Monday to Friday; (c) before 7am or after 1pm Saturdays; and (d) on Sundays or Public Holidays.	n/a	Not applicable.

Performance outcomes	Acceptable outcomes	Complies	Comments
PO13 Air pollutants, dust and sediment particles from excavation or filling, do not cause significant environmental harm or nuisance impacts.	**AO13.1** Dust emissions do not extend beyond the boundary of the site.	n/a	Not applicable.
	AO13.2 No other air pollutants, including odours, are detectable at the boundary of the site.	n/a	Not applicable.
	AO13.3 A management plan for control of dust and air pollutants is prepared and implemented.	n/a	Not applicable.
PO14 Access to the premises (including driveways and paths) does not have an adverse impact on: (a) safety; (b) drainage; (c) visual amenity; and (d) privacy of adjoining premises.	**AO14** Access to the premises (including all works associated with the access): (a) must follow as close as possible to the existing contours; (b) be contained within the premises and not the road reserve, and (c) are designed and constructed in accordance with the Design Guidelines and Specifications set out in the Planning Scheme Policy 4 – FNQROC Regional Development manual.	n/a	Not applicable.
Weed and pest management			
PO15 Development prevents the spread of weeds, seeds or other pests into clean areas or away from infested areas.	**AO15** No acceptable outcome is provided.	n/a	Not applicable.
Contaminated land			

Performance outcomes	Acceptable outcomes	Complies	Comments
PO16 Development is located and designed to ensure that users and nearby sensitive land uses are not exposed to unacceptable levels of contaminants	**AO16** Development is located where: (a) soils are not contaminated by pollutants which represent a health or safety risk to users; or (b) contaminated soils are remediated prior to plan sealing, operational works permit, or issuing of building works permit.	✔	The site is not a known or suspected contaminated site.
Fire services in developments accessed by common private title			
PO17 Fire hydrants are located in positions that will enable fire services to access water safely, effectively and efficiently.	**AO17.1** Fire hydrants are located in accessways or private roads held in common private title at a maximum spacing of: (a) 120 metres for residential development; and (b) 90 metres for any other development.	n/a	Not applicable.
	AO17.2 Fire hydrants are located at all intersections of accessways or private roads held in common private title.	n/a	Not applicable.